

# INTO 600

recessed


064-5101037BX



Project / Type

Notes

Count / Date

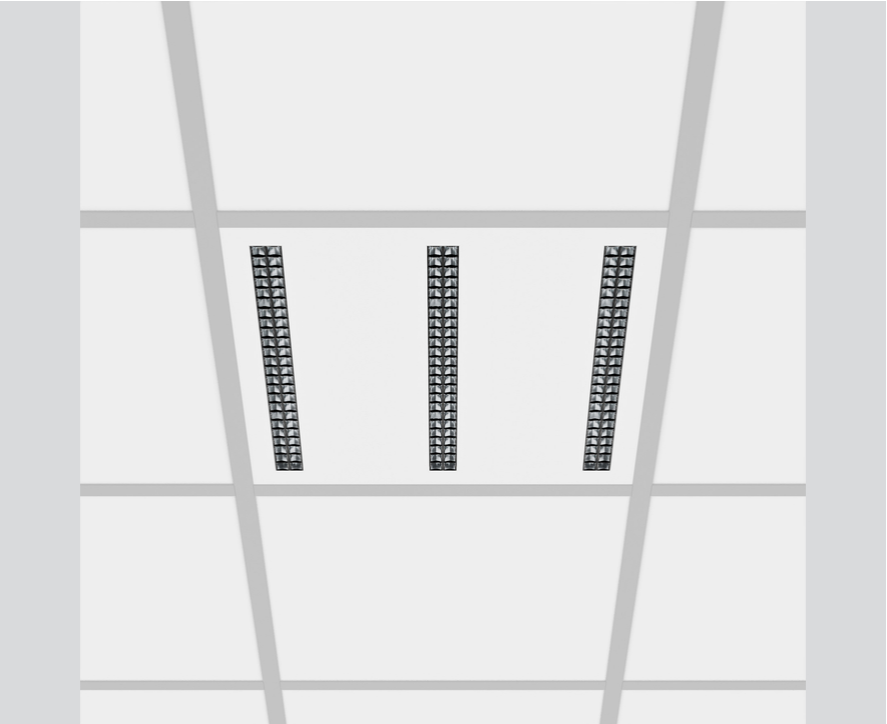

### General

Ceiling , Recessed

Traffic White , RAL 9016 <sup>1</sup>

Reflector Black

IP20

3930 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89

MR 0.61

MDER 0.55

### Optical

super wide flood

UGR ≤ 19 , ≥65° <1500 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 29.3 W

system 134 lm/W<sup>3</sup>

PC2

1 DALI Addr.

### Physical

length 600 mm

width 600 mm


height 15 mm

### Cutout


recessed depth 15 mm

Square lay-in luminaire made of sheet steel; for modular ceilings 600 x 600 with visible grid system; surface Traffic White powder coated; three linear light insets made of plastic; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector Black; precise radiation characteristic with symmetrical light distribution; exchangeable light insets; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m<sup>2</sup>; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; converter suitable for through-wiring; plug and play connection cables between light insets and converter with plug/socket system; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator

