

048-37109371A



Project / Type

Notes

Count / Date



Ceiling | Surface

rotation 360°

traffic white | RAL 9016

Inner colour jet black

IP20

526 lm

2700 K

2700 K

$CRI \geq 90$

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_q: 101 | R_f: 91 | R_{1-15}: 89

MR 0.56 | MDER 0.51

wallwasher

wallwasher

$$\text{PstLM} \leq 1.0 \text{ } ^1 | \text{SVM} \leq 0.4 \text{ } ^1$$

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 9.5 W


system 55 lm/W²

diameter 72 mm | height 108 mm

0.5 kg

¹ Value of containing product at full load (undimmed)² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Product drawing



SASSO 60 round wallwasher

ceiling

048-37109371A



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.95	0.94	0.93	0.92
LSF	1	1	1	1	1



MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	39
B16	63
B20	78
C10	63
C16	100
C20	125

Colour rendering

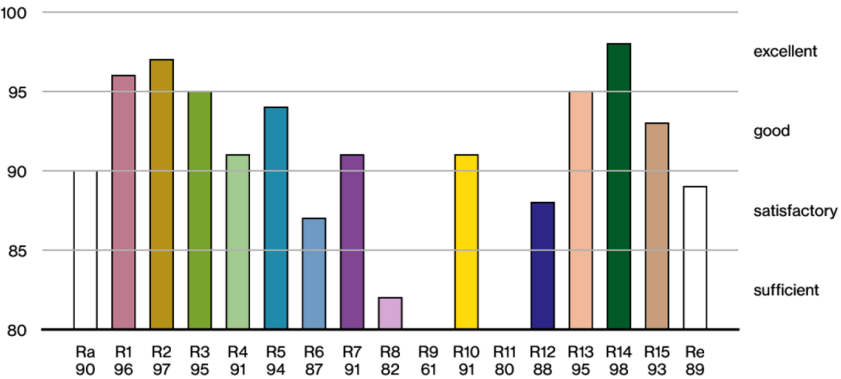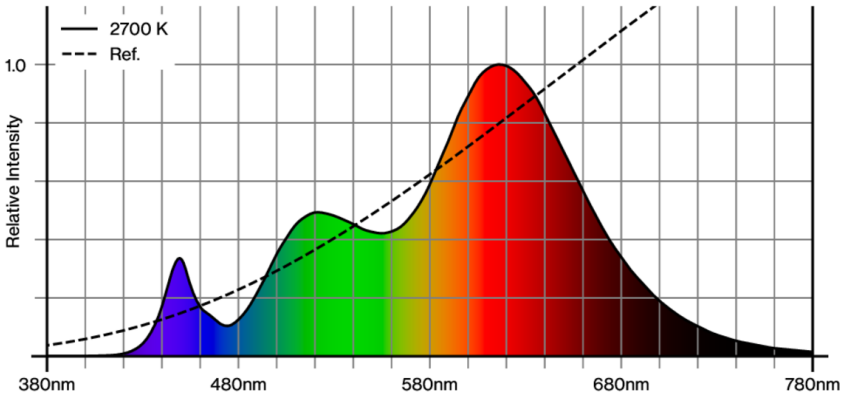

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

