

# SASSO 60 base square downlight 1 lamp

ceiling


048-30301179F



Project / Type

Notes

Count / Date

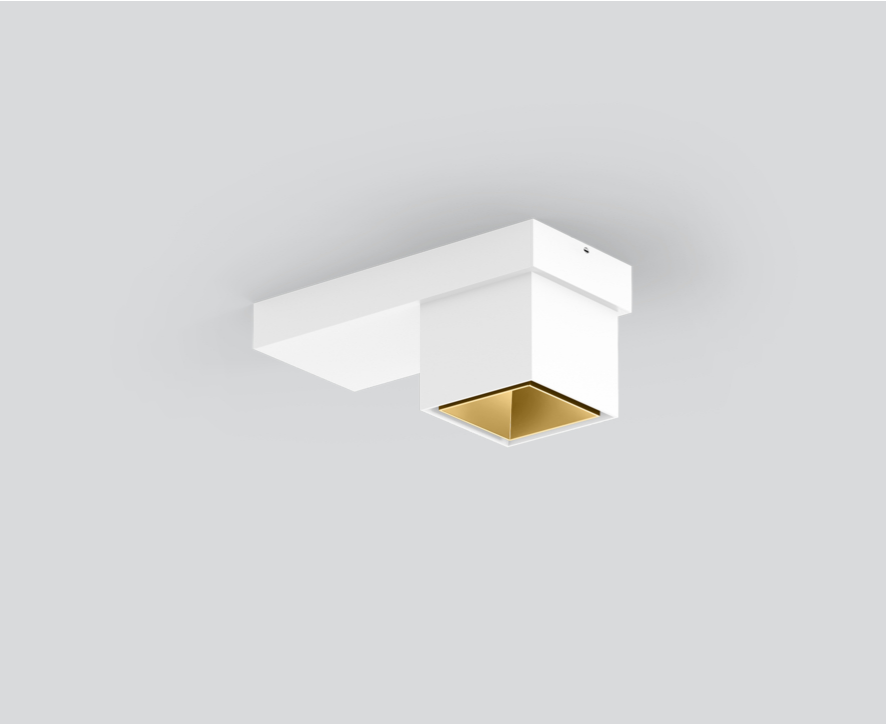

### General

Ceiling , Surface

white , RAL 9016 <sup>1</sup>

Inner colour gold

IP20

859 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 88

MR 0.8

MDER 0.72

### Optical

flood

beam angle 41°

UGR ≤ 19

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

220-240 V

system 10.2 W

system 84 lm/W<sup>3</sup>

PC1

### Physical


length 180 mm

width 80 mm


height 81 mm

0.5 kg

### Light distribution



### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator

