

SASSO 40 round wallwasher

trim

048-2840911A 048-2896317 002-90744



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
black , RAL 9005 ¹
Mounting set traffic white
IP20
407 lm
fixture 65 lm/W ²

LED
2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₁₅₎ : 89
MR 0.56
MDER 0.51

Optical
wallwasher
beam angle 118°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical
non DIM
220-240 V
system 7.6 W
fixture 6.3 W
36 Vf
200 mA
PC2


Physical
trim
diameter 60 mm
height 55 mm
0.6 kg

Cutout
diameter 56 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm


¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

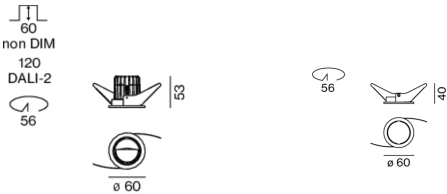

Installation instructions



Lighting calculator

