

SASSO 100 square wallwasher/floor

trim 2 lamps


048-2750117W 048-279931G 002-90789



Project / Type

Notes

Count / Date

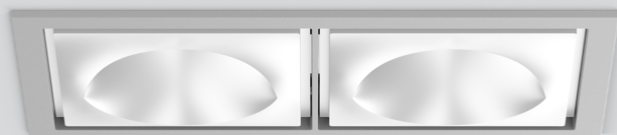

General

Ceiling , Recessed
white , RAL 9016 ¹
Mounting set white aluminium
IP20
5640 lm
fixture 131 lm/W²

LED

4000 K
CRI \geq 90
L80 / 50000 h
initial MacAdam \leq 2 SDCM
R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88
MR 0.8
MDER 0.72

Optical

wallwasher floor
PstLM \leq 1.0 ³
SVM \leq 0.4 ³

Electrical

DALI-2
220-240 V
system 50 W
fixture 21.5 W
36 Vf
650 mA
fixture 43 W
PC2

Physical

trim
length 218 mm
width 118 mm
height 96 mm
0.87 kg

Cutout


length 210 mm
width 112 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code


² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

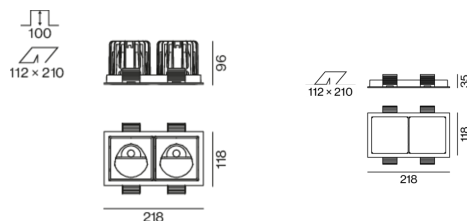

[048-2750117W 048-279931G 002-90789] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.05.2025

1 / 1

Installation instructions



Lighting calculator

