

SASSO 100 round wallwasher/floor

trimless exposed concrete

048-2740214W 048-2795210 002-90789



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
rotation 360°	
matt silver	
Mounting set white aluminium	
IP20	
2750 lm	
fixture 128 lm/W ¹	

LED

3500 K	
CRI ≥ 90	
L80 / 50000 h	
initial MacAdam ≤ 2 SDCM	
R _g : 99 , R _r : 90 , R _{t(1-15)} : 89	
MR 0.7	
MDER 0.64	

Optical

wallwasher floor	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 25.2 W	
fixture 21.5 W	
36 Vf	
650 mA	
PC2	

Physical


trimless for exposed concrete ceiling	
length 230 mm	
width 230 mm	
height 162 mm	
2.9 kg	

Cutout


recessed depth 100 mm	
-----------------------	--

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

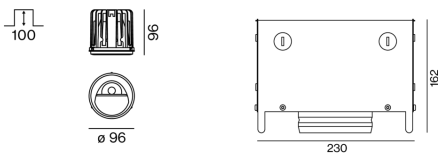

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

