SASSO 60 round adjustable

trim 2 lamps

048-2622917F 048-2698317 002-90790

Project / Type

Notes

Count / Date

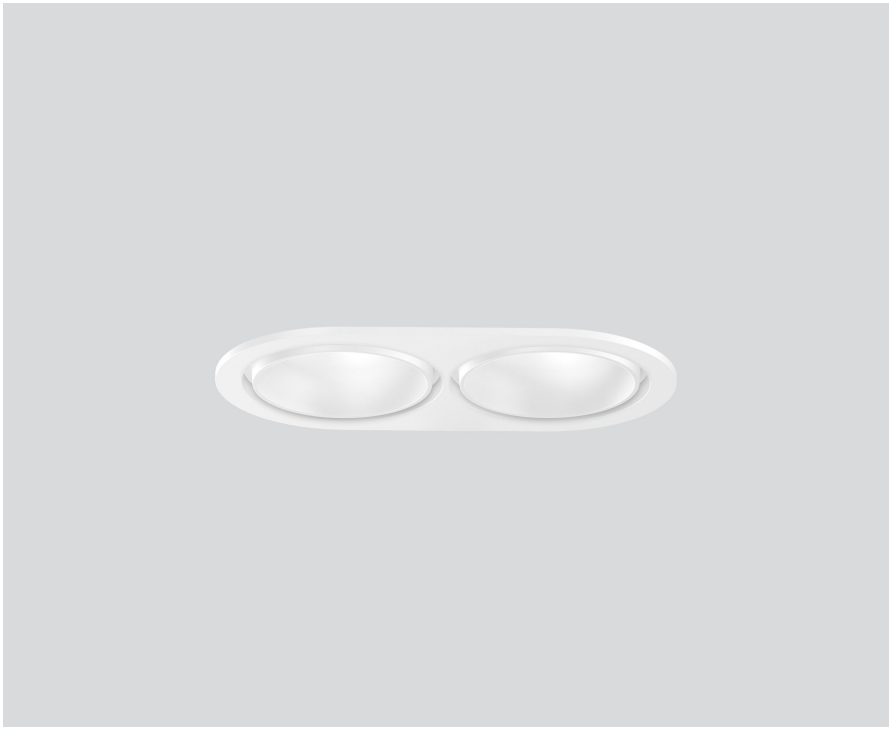

Round recessed spotlight in die-cast aluminium; 2 lamps; surface traffic white; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 41° beam; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



IP20 IP40 | X-PERT | X-PERT | 220-240 V

General

Ceiling | Recessed
tilt max 30°
rotation 360°
traffic white | RAL 9016 [1]
Mounting set traffic white
front IP40 | back IP20
1980 lm
fixture 93 lm/W [2]

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 97 | R_f: 91 | R_{f1-15}: 87
MR 0.52 | MDER 0.47

Optical

flood | beam angle 41°
PstLM ≤ 1.0 [3]| SVM ≤ 0.4 [3]

Electrical

DALI-2 | 1 DALI Addr.
PC2 | 220-240 V
system 25.0 W | fixture 10.6 W
total fixtures 21.3 W
36 Vf | 300 mA

Physical

trim
length 147 mm | width 80 mm | height 48 mm
4.7 kg

Cutout

diameter 70 mm | length 70 mm | width 136 mm
min. ceiling thickness 2 mm | max. ceiling thickness 25 mm
recessed depth 100 mm

[1] RAL code
[2] incl. consideration of optical losses & internal control unit losses
[3] Value of containing product at full load (undimmed)

Installation instructions

Lighting calculator

['048-2622917F 048-2698317 002-90790'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com