


SASSO 60 round adjustable

trim 2 lamps

048-2622211M 048-2698317 002-90790



| |
|----------------|
| Project / Type |
| Notes |
| Count / Date |

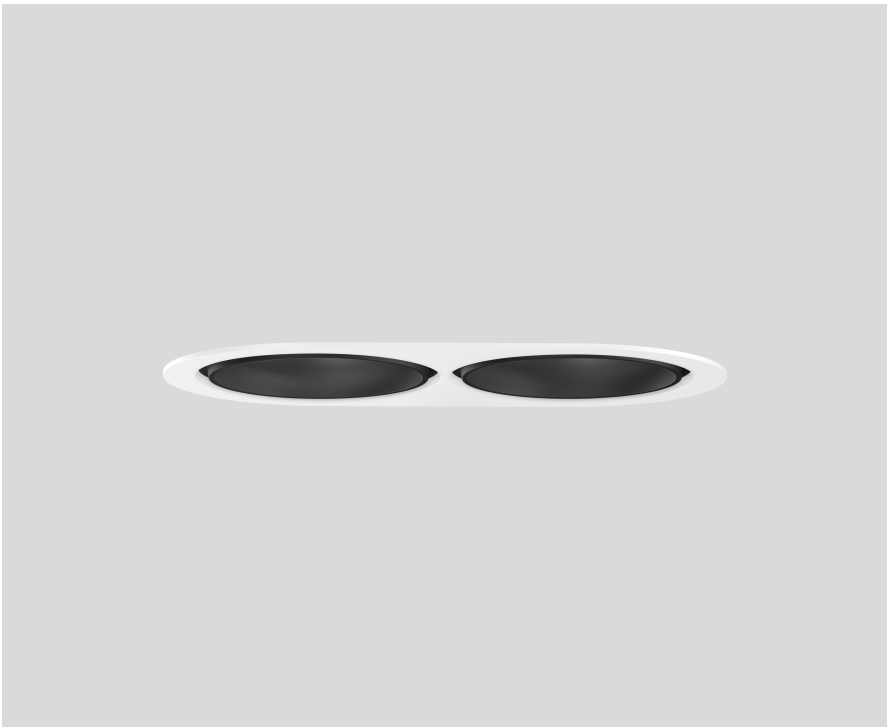

General

| |
|-------------------------------|
| Ceiling Recessed |
| tilt max 30° |
| rotation 360° |
| black RAL 9005 ¹ |
| Mounting set traffic white |
| front IP40 back IP20 |
| 2000 lm |
| fixture 94 lm/W ² |

LED

| |
|--|
| 3500 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 99 R _f : 90 R _{t-15} : 89 |
| MR 0.7 MDER 0.64 |

Optical

| |
|---|
| medium beam angle 27° |
| UGR ≤ 16 |
| PstLM ≤ 1.0 ³ SVM ≤ 0.4 ³ |

Electrical

| |
|--------------------------------|
| DALI-2 1 DALI Addr. |
| PC2 220-240 V |
| system 25.0 W fixture 10.6 W |
| total fixtures 21.3 W |
| 36 Vf 300 mA |


Physical

| |
|--|
| trim |
| length 147 mm width 80 mm height 48 mm |
| 4.7 kg |


Cutout

| |
|--|
| diameter 70 mm length 70 mm width 136 mm |
| min. ceiling thickness 2 mm max. ceiling thickness 25 mm |
| recessed depth 100 mm |

Light distribution



Product drawing



¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

