

# SASSO 60 square downlight

trim

048-2612217S 048-269731G 002-90790



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



General
Ceiling , Recessed
white , RAL 9016 <sup>1</sup>
Mounting set white aluminium
front IP44 , back IP20
933 lm
fixture 86 lm/W <sup>2</sup>


LED
3500 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t1-15</sub> : 87
MR 0.6
MDER 0.54

Optical
spot
beam angle 15°
UGR ≤ 19
PstLM ≤ 1.0 <sup>3</sup>
SVM ≤ 0.4 <sup>3</sup>


Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 19; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical
DALI-2
220-240 V
system 12.8 W
fixture 10.9 W
36 Vf
300 mA
PC2
1 DALI Addr.

## Light distribution



## Product drawing

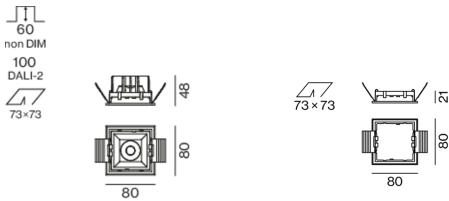

Physical
trim
length 80 mm
width 80 mm
height 48 mm
4.7 kg

Cutout
length 73 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 square downlight

trim

048-2612217S 048-269731G 002-90790



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

