

SASSO 60 square downlight

trimless

048-2612111W 048-2697117 002-90790



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

black , RAL 9005 ¹

Mounting set traffic white

front IP44 , back IP20

1040 lm

fixture 97 lm/W²

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88

MR 0.8

MDER 0.72

Optical

wide flood

beam angle 57°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 12.5 W

fixture 10.6 W

36 Vf

300 mA

PC2

1 DALI Addr.

Physical

trimless

length 72 mm

width 72 mm

height 48 mm

4.7 kg

Cutout

length 73 mm

width 73 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 105 mm

¹ RAL code


² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

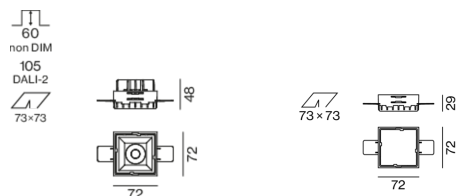

SASSO 60 square downlight

trimless

048-2612111W 048-2697117 002-90790



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

