

# SASSO 60 round downlight

trim 2 lamps

048-2602017M 048-269831G 002-90790



Project / Type	
Notes	
Count / Date	



--	--	--	--	--

## General

Ceiling , Recessed
rotation 360°
white , RAL 9016 <sup>1</sup>
Mounting set white aluminium
front IP44 , back IP20
2180 lm
fixture 102 lm/W <sup>2</sup>

## LED


3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 87
MR 0.6
MDER 0.54

## Optical


medium
beam angle 27°
PstLM ≤ 1.0 <sup>3</sup>
SVM ≤ 0.4 <sup>3</sup>

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 27° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

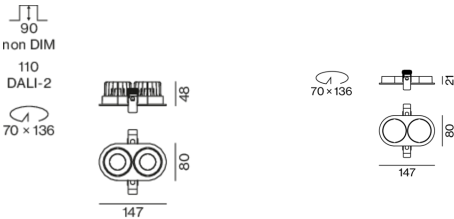

## Electrical

DALI-2
220-240 V
system 25.0 W
fixture 10.6 W
36 Vf
300 mA
fixture 21.3 W
PC2
1 DALI Addr.

## Physical

trim
length 147 mm
width 80 mm
height 48 mm
4.7 kg

## Cutout

diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 round downlight

trim 2 lamps

048-2602017M 048-269831G 002-90790



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

