

SASSO 60 square wallwasher/floor

trim 2 lamps

048-2651119W 048-269931G 002-90748



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
gold , RAL 260-M ¹
Mounting set white aluminium
IP20
2180 lm
fixture 123 lm/W ²

LED
4000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 92 , R ₍₁₋₁₅₎ : 90
MR 0.81
MDER 0.74

Optical
wallwasher floor
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical
DALI-2
220-240 V
system 20.8 W
fixture 8.9 W
36 Vf
250 mA
fixture 17.7 W
PC2
1 DALI Addr.


Physical
trim
length 147 mm
width 81 mm
height 49 mm

Cutout
length 138 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm


¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

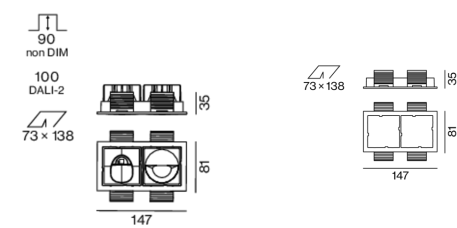

Installation instructions



Lighting calculator

