

SASSO 60 square wallwasher

trimless

048-2651011A 048-2697117 002-90748



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
black , RAL 9005 ¹	
Mounting set traffic white	
IP20	
588 lm	
fixture 73 lm/W ²	

LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 92 , R _{f(1-5)} : 91	
MR 0.64	
MDER 0.58	

Optical

wallwasher	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Electrical

DALI-2	
220-240 V	
system 9.5 W	
fixture 8.1 W	
36 Vf	
250 mA	
PC2	
1 DALI Addr.	

Physical

trimless	
length 72 mm	
width 72 mm	
height 48 mm	


Cutout

length 73 mm	
width 73 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 105 mm	


¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

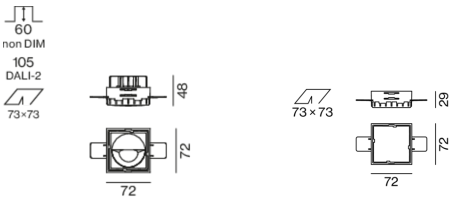

Installation instructions



Lighting calculator

