

# SASSO 60 square wallwasher

trim

048-2651119A 048-2697317 002-90748



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

gold , RAL 260-M <sup>1</sup>

Mounting set traffic white

IP20

633 lm

fixture 78 lm/W<sup>2</sup>

### LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 102 , R<sub>f</sub>: 93 , R<sub>f(-15)</sub>: 92

MR 0.81

MDER 0.74

### Optical

wallwasher

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

### Electrical

DALI-2

220-240 V

system 9.5 W

fixture 8.1 W

36 Vf

250 mA

PC2

1 DALI Addr.

### Physical

trim

length 80 mm

width 80 mm

height 48 mm

### Cutout

length 73 mm

width 73 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

### Light distribution



### Product drawing

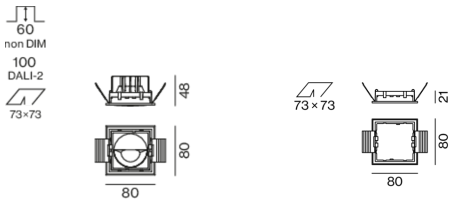

### Installation instructions



### Lighting calculator

