

# SASSO 60 square wallwasher

trim

048-2651911A 048-269731G 002-90748



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

black , RAL 9005 <sup>1</sup>

Mounting set white aluminium

IP20

542 lm

fixture 67 lm/W<sup>2</sup>

### LED

2700 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 101 , R<sub>f</sub>: 91 , R<sub>(1-5)</sub>: 89

MR 0.56

MDER 0.51

### Optical

wallwasher

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

### Electrical

DALI-2

220-240 V

system 9.5 W

fixture 8.1 W

36 Vf

250 mA

PC2

1 DALI Addr.

### Physical

trim

length 80 mm

width 80 mm

height 48 mm

### Cutout

length 73 mm

width 73 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

### Light distribution



### Product drawing

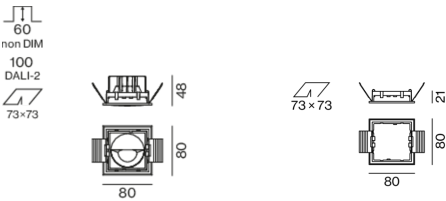

### Installation instructions



### Lighting calculator

