

# SASSO 60 square wallwasher

trim

048-2651117A 048-2697317 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
white , RAL 9016 <sup>1</sup>  
Mounting set traffic white  
IP20  
670 lm  
fixture 83 lm/W<sup>2</sup>

## LED

4000 K  
CRI  $\geq$  90  
L90 / 50000 h  
initial MacAdam  $\leq$  3 SDCM  
R<sub>g</sub>: 102 , R<sub>f</sub>: 93 , R<sub>f(-15)</sub>: 92  
MR 0.81  
MDER 0.74

## Optical

wallwasher  
PstLM  $\leq$  1.0 <sup>3</sup>  
SVM  $\leq$  0.4 <sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 9.5 W  
fixture 8.1 W  
36 Vf  
250 mA  
PC2

## Physical

trim  
length 80 mm  
width 80 mm  
height 48 mm  
0.22 kg

## Cutout


length 73 mm  
width 73 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 60 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

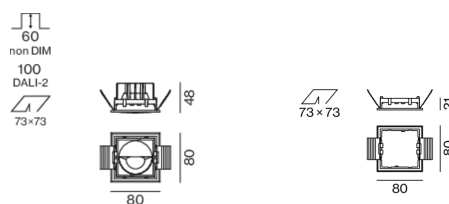

[048-2651117A 048-2697317 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

30.04.2025

1 / 1

## Installation instructions



## Lighting calculator

