

# SASSO 60 square wallwasher/floor

trim 2 lamps

048-2651111W 048-2699317 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
black , RAL 9005 <sup>1</sup>  
Mounting set traffic white  
IP20  
2160 lm  
fixture 121 lm/W<sup>2</sup>

## LED

4000 K  
CRI ≥ 90  
L85 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 90  
MR 0.81  
MDER 0.74

## Optical

wallwasher floor  
PstLM ≤ 1.0 <sup>3</sup>  
SVM ≤ 0.4 <sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 20.8 W  
fixture 8.9 W  
36 Vf  
250 mA  
fixture 17.7 W  
PC2

## Physical

trim  
length 147 mm  
width 81 mm  
height 49 mm  
0.26 kg

## Cutout

length 138 mm  
width 73 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 90 mm

<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)


## Installation instructions




## Lighting calculator



## Light distribution



## Product drawing

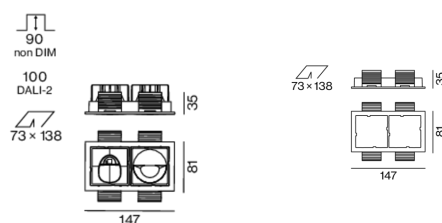

[048-2651111W 048-2699317 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

02.05.2025

1 / 1