

# SASSO 60 square wallwasher

trim 2 lamps

048-2651217A 048-269931G 002-90742



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_




Recessed square spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

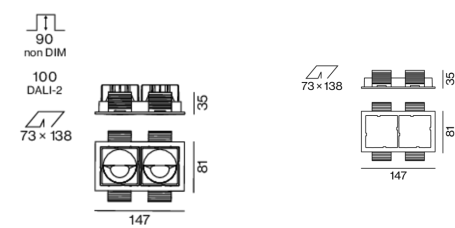

### General

Ceiling , Recessed \_\_\_\_\_

white , RAL 9016 <sup>1</sup> \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

IP20 \_\_\_\_\_

1290 lm \_\_\_\_\_

fixture 80 lm/W<sup>2</sup> \_\_\_\_\_

### LED

3500 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L90 / 50000 h \_\_\_\_\_

MR 0.82 \_\_\_\_\_

MDER 0.74 \_\_\_\_\_

### Optical

wallwasher \_\_\_\_\_

PstLM ≤ 1.0 <sup>3</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>3</sup> \_\_\_\_\_

### Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 19.0 W \_\_\_\_\_

fixture 8.1 W \_\_\_\_\_

36 Vf \_\_\_\_\_

250 mA \_\_\_\_\_

fixture 16.2 W \_\_\_\_\_

PC2 \_\_\_\_\_

### Physical

trim \_\_\_\_\_

length 147 mm \_\_\_\_\_

width 81 mm \_\_\_\_\_

height 48 mm \_\_\_\_\_

0.26 kg \_\_\_\_\_

### Cutout

length 138 mm \_\_\_\_\_

width 73 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 90 mm \_\_\_\_\_

<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

### Installation instructions



### Lighting calculator

