

SASSO 60 square wallwasher

trim

048-2651217A 048-269731G 002-90748



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
 white , RAL 9016 ¹
 Mounting set white aluminium
 IP20
 644 lm
 fixture 80 lm/W²

LED

3500 K
 CRI ≥ 90
 L90 / 50000 h
 MR 0.82
 MDER 0.74

Optical

wallwasher
 PstLM ≤ 1.0 ³
 SVM ≤ 0.4 ³

Electrical

DALI-2
 220-240 V
 system 9.5 W
 fixture 8.1 W
 36 Vf
 250 mA
 PC2
 1 DALI Addr.

Physical


trim
 length 80 mm
 width 80 mm
 height 48 mm

Cutout


length 73 mm
 width 73 mm
 min. ceiling thickness 2 mm
 max. ceiling thickness 25 mm
 recessed depth 100 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

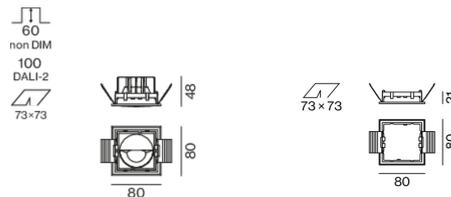

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



[048-2651217A 048-269731G 002-90748] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.05.2025

1 / 1