

SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641914W 048-269831G 002-90742



Project / Type

Notes

Count / Date




General
Ceiling , Recessed
rotation 360°
matt silver
Mounting set white aluminium
IP20
2000 lm
fixture 113 lm/W ¹

LED
2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101, R _r : 90, R _{1-15} : 88
MR 0.51
MDER 0.46


Optical
wallwasher floor
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

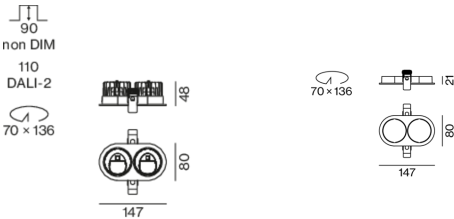

Electrical
non DIM
220-240 V
system 20.8 W
fixture 8.9 W
36 Vf
250 mA
fixture 17.7 W
PC2

Physical
trim
length 147 mm
width 80 mm
height 48 mm
0.26 kg

Cutout
diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 90 mm

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)



SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641914W 048-269831G 002-90742



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

