

SASSO 60 round
wallwasher

trimless

048-2641111A 048-2696117 002-90742



Project / Type

Notes

Count / Date




General
Ceiling , Recessed
rotation 360°
black , RAL 9005 ¹
Mounting set traffic white
IP20
594 lm
fixture 73 lm/W ²

LED
4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 102 , R _r : 93 , R ₍₁₋₁₅₎ : 92
MR 0.81
MDER 0.74


Optical
wallwasher
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

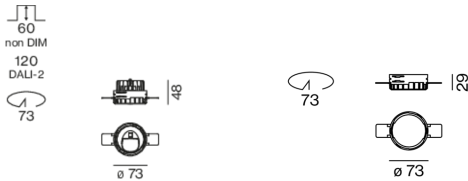

Electrical
non DIM
220-240 V
system 9.5 W
fixture 8.1 W
36 Vf
250 mA
PC2

Physical
trimless
diameter 73 mm
height 48 mm
0.2 kg

Cutout
diameter 73 mm
recessed depth 60 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

