

# SASSO 60 round wallwasher/floor trim soft acoustic ceiling


048-2641019W 048-2696398 002-90742



Project / Type

Notes

Count / Date

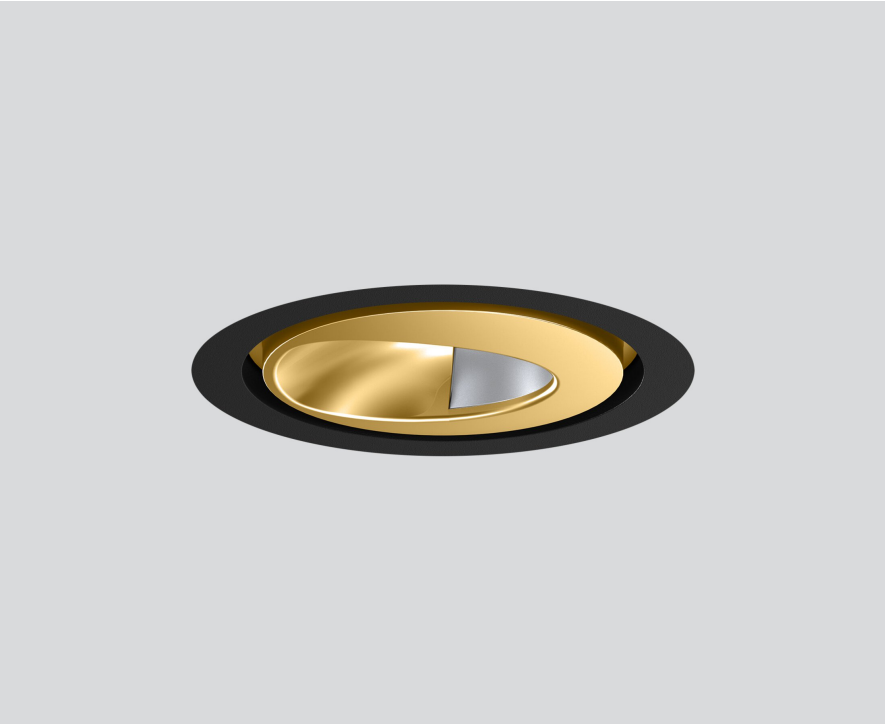


Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold dust; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling | Recessed  
rotation 360°  
gold dust | RAL 260-M  
Mounting set jet black  
IP20  
1030 lm  
fixture 117 lm/W<sup>1</sup>

## LED

3000 K  
CRI ≥ 90  
L85 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 99 | R<sub>r</sub>: 91 | R<sub>(1-15)</sub>: 89  
MR 0.61 | MDER 0.55

## Optical

wallwasher floor  
PstLM ≤ 1.0<sup>2</sup> | SVM ≤ 0.4<sup>2</sup>

## Electrical

non DIM  
PC2 | 220-240 V  
system 10.4 W | fixture 8.9 W  
36 Vf | 250 mA

## Physical

with trim for acoustic ceiling  
diameter 80 mm | height 48 mm  
0.27 kg

## Cutout

diameter 74 mm  
min. ceiling thickness 25 mm | max. ceiling thickness 40 mm  
recessed depth 100 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses  
<sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

