

SASSO 60 round adjustable

trimless exposed concrete

048-2622917W 048-2695210 002-90771



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

white , RAL 9016 ¹ _____

Mounting set white aluminium _____

front IP40 , back IP20 _____

1050 lm _____

fixture 98 lm/W² _____

LED

2700 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 97 , R_f: 91 , R_{1-15}: 87 _____

MR 0.52 _____

MDER 0.47 _____

Optical

wide flood _____

beam angle 56° _____

PstLM ≤ 1.0 ³ _____

SVM ≤ 0.4 ³ _____

Electrical

non DIM _____

220-240 V _____

system 12.5 W _____

fixture 10.6 W _____

36 Vf _____

300 mA _____

PC2 _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____


height 162 mm _____

2.37 kg _____


Cutout

recessed depth 60 mm _____

Light distribution



Product drawing

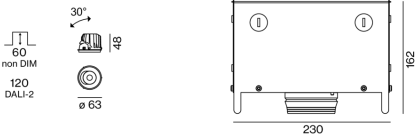

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



SASSO 60 round adjustable

trimless exposed concrete

048-2622917W 048-2695210 002-90771



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|--------|---------------------------------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | | Room Surface Maintenance Factor |
| MF | Maintenance Factor | | LLMF | | Lamp Lumens Maintenance Factor |
| LMF ^a | Luminaire Maintenance Factor | | LSF | | Lamp Survival Factor |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 43 |
| B13 | 55 |
| B16 | 68 |
| B20 | 85 |
| C10 | 72 |
| C13 | 94 |
| C16 | 116 |
| C20 | 145 |

Components

EXPOSED CONCRETE MOUNTING HOUSING

| COLOUR | L·W·H (MM) | ARTICLE NUMBER(S) |
|-----------------|-------------|-------------------|
| white aluminium | 230-230-162 | 048-2695210 |



POWER SUPPLY

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 13 W | 85-40-22 | 002-90771 |



Optional electrical accessories

DIN RAIL LED DRIVER

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |



DIN RAIL POWER SUPPLY

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63 | 005-6520210 |



Optional electrical accessories

POWER SUPPLY PREWIRED

| TYPE | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box DALI-2 | 002-90790A |
| with junktion box DALI-2 | 002-90748A |
| with junktion box non DIM | 002-90771A |
| with junktion box non DIM | 002-90742A |



[*048-2622917W 048-2695210 002-90771*] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.05.2025

SASSO 60 round adjustable

trimless exposed concrete

048-2622917W 048-2695210 002-90771



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|----------------------------|------------|-------------------|
| with loop through function | 185-30-21 | 002-90770 |
| with loop through function | 185-30-21 | 002-90747 |

