

SASSO 60 round adjustable

trim 2 lamps

048-2622911F 048-2698317 002-90771




| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |




Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 40° beam; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

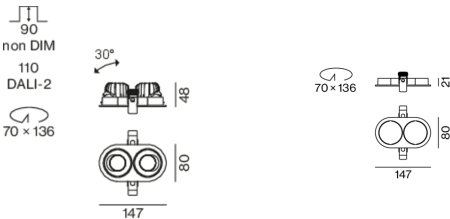

General

| |
|-------------------------------|
| Ceiling , Recessed |
| tilt max 30° |
| rotation 360° |
| black , RAL 9005 ¹ |
| Mounting set traffic white |
| front IP40 , back IP20 |
| 1690 lm |
| fixture 79 lm/W ² |

LED

| |
|--|
| 2700 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 97 , R _f : 91 , R _{1-15} : 87 |
| MR 0.52 |
| MDER 0.47 |

Optical

| |
|--|
| flood |
| beam angle 40° |
| UGR ≤ 19 , $\geq 65^\circ < 1500$ cd/m ² |
| PstLM ≤ 1.0 ³ |
| SVM ≤ 0.4 ³ |

Electrical

| |
|----------------|
| non DIM |
| 220-240 V |
| system 25.0 W |
| fixture 10.6 W |
| 36 Vf |
| 300 mA |
| fixture 21.3 W |
| PC2 |

Physical

| |
|---------------|
| trim |
| length 147 mm |
| width 80 mm |
| height 48 mm |
| 0.3 kg |

Cutout

| |
|------------------------------|
| diameter 70 mm |
| length 70 mm |
| width 136 mm |
| min. ceiling thickness 2 mm |
| max. ceiling thickness 25 mm |
| recessed depth 90 mm |

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)



SASSO 60 round adjustable

trim 2 lamps

048-2622911F 048-2698317 002-90771



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



SASSO 60 round adjustable

trim 2 lamps

048-2622911F 048-2698317 002-90771



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Factor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 43 |
| B13 | 55 |
| B16 | 68 |
| B20 | 85 |
| C10 | 72 |
| C13 | 94 |
| C16 | 116 |
| C20 | 145 |

Components

MOUNTING SET with trim 2 lamps

| | | | |
|---------------------------|---------------|------------|-------------------|
| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
| for intermediate ceilings | traffic white | 147-80-21 | 048-2698317 |



POWER SUPPLY

| | | |
|------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| 13 W | 85-40-22 | 002-90771 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| | | |
|-----------------|-------------|-------------------|
| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
| white aluminium | 614-307-120 | 048-2695110 |



Optional electrical accessories

DIN RAIL LED DRIVER

| | | |
|--------------------------------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |



DIN RAIL POWER SUPPLY

| | | |
|-------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| 160 W | 72-90-63 | 005-6520210 |



SASSO 60 round adjustable

trim 2 lamps

048-2622911F 048-2698317 002-90771



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY PREWIRED

| TYPE | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box DALI-2 | 002-90790A |
| with junktion box DALI-2 | 002-90748A |
| with junktion box non DIM | 002-90771A |
| with junktion box non DIM | 002-90742A |

Optional electrical accessories

POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|----------------------------|------------|-------------------|
| with loop through function | 185-30-21 | 002-90770 |
| with loop through function | 185-30-21 | 002-90747 |

