

SASSO 60 square downlight

trim

048-2612917S 048-2697317 002-90771



Project / Type	
Notes	
Count / Date	



--	--	--	--

General
Ceiling , Recessed
white , RAL 9016 ¹
Mounting set traffic white
front IP44 , back IP20
885 lm
fixture 81 lm/W ²


LED
2700 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _f : 91 , R _{f(1-15)} : 87
MR 0.52
MDER 0.47

Optical
spot
beam angle 15°
UGR ≤ 19
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³


Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 19; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical
non DIM
220-240 V
system 12.8 W
fixture 10.9 W
36 Vf
300 mA
PC2

Light distribution



Product drawing

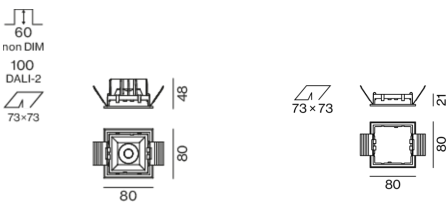

Physical
trim
length 80 mm
width 80 mm
height 48 mm
0.26 kg

Cutout
length 73 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

