

# SASSO 60 square downlight

trimless

048-2612114S 048-2697117 002-90771



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

976 lm

fixture 90 lm/W<sup>1</sup>

## LED

4000 K

CRI  $\geq 90$

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 88

MR 0.8

MDER 0.72

## Optical

spot

beam angle 15°

UGR  $\leq 16$  ,  $\geq 65^\circ$   $< 1500$  cd/m<sup>2</sup>

PstLM  $\leq 1.0$  <sup>2</sup>

SVM  $\leq 0.4$  <sup>2</sup>

## Electrical

non DIM

220-240 V

system 12.8 W

fixture 10.9 W

36 Vf

300 mA

PC2

## Physical

trimless

length 72 mm

width 72 mm

height 48 mm

0.25 kg

## Cutout

length 73 mm

width 73 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 60 mm


<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

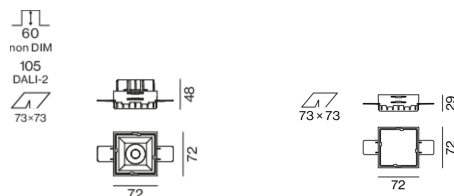

## Installation instructions



## Lighting calculator



[048-2612114S 048-2697117 002-90771] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

30.04.2025

# SASSO 60 square downlight

trimless

048-2612114S 048-2697117 002-90771



Project / Type

Notes

Count / Date

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	43
B13	55
B16	68
B20	85
C10	72
C13	94
C16	116
C20	145

## Components

### MOUNTING SET trimless

TYPE for plasterboard ceilings 12.5/15/25 mm	COLOUR traffic white	L·W·H (MM) 72·72·29	ARTICLE NUMBER(S) 048-2697117
---	-------------------------	------------------------	----------------------------------



### POWER SUPPLY

TYPE 13 W	L·W·H (MM) 85·40·22	ARTICLE NUMBER(S) 002-90771
--------------	------------------------	--------------------------------



## Mounting accessories

### THROUGH WIRING CONNECTION BOX

TYPE non DIM cable ø 4 – 12 mm, Linect®-Ready DALI cable ø 4 – 12 mm, Linect®-Ready	L·W·H (MM) 105·58·30 105·58·30	ARTICLE NUMBER(S) 005-2531110 005-2551110
---	--------------------------------------	---



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

COLOUR white aluminium	L·W·H (MM) 614·307·120	ARTICLE NUMBER(S) 048-2695110
---------------------------	---------------------------	----------------------------------



## Optional electrical accessories

### DIN RAIL LED DRIVER

TYPE DALI-2   200-1050 mA   2 x 42W	L·W·H (MM) 36·88·59	ARTICLE NUMBER(S) 005-6121030
--	------------------------	----------------------------------



### DIN RAIL POWER SUPPLY

TYPE 160 W	L·W·H (MM) 72·90·63	ARTICLE NUMBER(S) 005-6520210
---------------	------------------------	----------------------------------



# SASSO 60 square downlight

trimless

048-2612114S 048-2697117 002-90771



Project / Type

Notes

Count / Date

## Optional electrical accessories

### POWER SUPPLY PREWIRED

TYPE	ARTICLE NUMBER(S)
with junktion box   DALI-2	002-90790A
with junktion box   DALI-2	002-90748A
with junktion box   non DIM	002-90771A
with junktion box   non DIM	002-90742A

## Optional electrical accessories

### POWER SUPPLY

TYPE	L·W·H (MM)	ARTICLE NUMBER(S)
with loop through function	185-30-21	002-90770
with loop through function	185-30-21	002-90747

