

SASSO 60 round downlight


trim

048-2602014F 048-2696317 002-90771




Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 40° beam; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

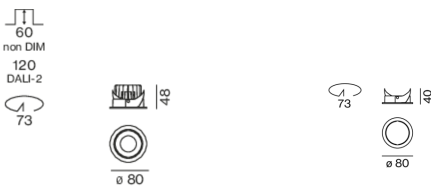

| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |



General

| | |
|------------------------------|--|
| Ceiling , Recessed | |
| rotation 360° | |
| matt silver | |
| Mounting set traffic white | |
| front IP44 , back IP20 | |
| 1030 lm | |
| fixture 97 lm/W ¹ | |

LED

| | |
|--|--|
| 3000 K | |
| CRI ≥ 90 | |
| L80 / 50000 h | |
| initial MacAdam ≤ 2 SDCM | |
| R _g : 99 , R _r : 90 , R _{t(1-5)} : 87 | |
| MR 0.6 | |
| MDER 0.54 | |

Optical

| | |
|--|--|
| flood | |
| beam angle 40° | |
| UGR ≤ 19 , $\geq 65^\circ$ < 1500 cd/m ² | |
| PstLM ≤ 1.0 ² | |
| SVM ≤ 0.4 ² | |

Electrical

| | |
|----------------|--|
| non DIM | |
| 220-240 V | |
| system 12.5 W | |
| fixture 10.6 W | |
| 36 Vf | |
| 300 mA | |
| PC2 | |

Physical

| | |
|----------------|--|
| trim | |
| diameter 80 mm | |
| height 48 mm | |
| 0.23 kg | |

Cutout

| | |
|------------------------------|--|
| diameter 73 mm | |
| min. ceiling thickness 2 mm | |
| max. ceiling thickness 25 mm | |
| recessed depth 60 mm | |

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



SASSO 60 round downlight

trim

048-2602014F 048-2696317 002-90771



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Factor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 43 |
| B13 | 55 |
| B16 | 68 |
| B20 | 85 |
| C10 | 72 |
| C13 | 94 |
| C16 | 116 |
| C20 | 145 |

Components

MOUNTING SET with trim 1 lamp

| | | | |
|---------------------------|---------------|--------|-------------------|
| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
| for intermediate ceilings | traffic white | 80 | 048-2696317 |



POWER SUPPLY

| | | |
|------|------------|-------------------|
| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
| 13 W | 85-40-22 | 002-90771 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| | | |
|-----------------|-------------|-------------------|
| COLOUR | L·W·H (MM) | ARTICLE NUMBER(S) |
| white aluminium | 614-307-120 | 048-2695110 |



Optional electrical accessories

DIN RAIL LED DRIVER

| | | |
|--------------------------------|------------|-------------------|
| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |



DIN RAIL POWER SUPPLY

| | | |
|-------|------------|-------------------|
| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
| 160 W | 72-90-63 | 005-6520210 |



SASSO 60 round downlight

trim

048-2602014F 048-2696317 002-90771



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY PREWIRED

| TYPE | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box DALI-2 | 002-90790A |
| with junktion box DALI-2 | 002-90748A |
| with junktion box non DIM | 002-90771A |
| with junktion box non DIM | 002-90742A |

Optional electrical accessories

POWER SUPPLY

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|----------------------------|------------|-------------------|
| with loop through function | 185-30-21 | 002-90770 |
| with loop through function | 185-30-21 | 002-90747 |

