

SASSO 40 round adjustable trimless soft acoustic ceiling


048-2820619S 048-2896197 002-90753



Project / Type

Notes

Count / Date

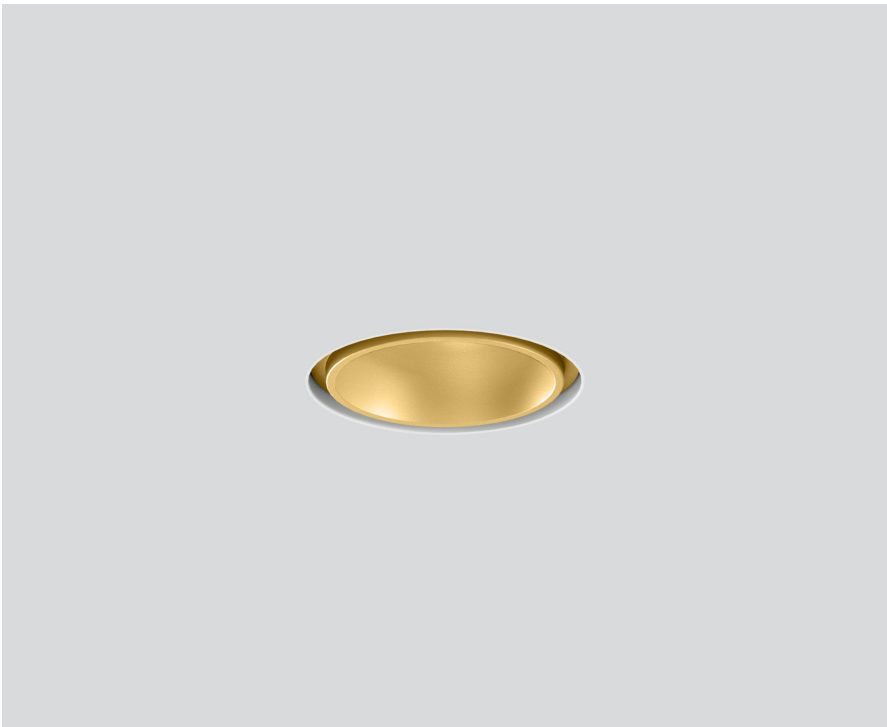

| |
|------------------------------------|
| General |
| Ceiling Recessed |
| tilt max 30° |
| rotation 360° |
| gold dust RAL 260-M ¹ |
| Mounting set traffic white |
| front IP40 back IP20 |
| 404 lm |
| fixture 79 lm/W ² |

| |
|---|
| LED |
| 4000 K |
| CRI ≥ 90 |
| L85 / 50000 h |
| initial MacAdam ≤ 3 SDCM |
| R _g : 94 R _r : 87 R _{f(1-15)} : 90 |
| MR 0.86 MDER 0.78 |

| |
|---|
| Optical |
| spot beam angle 14° |
| UGR ≤ 10 |
| PstLM ≤ 1.0 ³ SVM ≤ 0.4 ³ |


| |
|------------------------------|
| Electrical |
| DALI-2 |
| PC2 220-240 V |
| system 6.2 W fixture 5.1 W |
| 12 Vf 450 mA |

| |
|-------------------------------|
| Physical |
| trimless |
| diameter 56 mm height 50 mm |


| |
|-----------------------|
| Cutout |
| diameter 58 mm |
| recessed depth 140 mm |

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator



SASSO 40 round adjustable trimless soft acoustic ceiling

048-2820619S 048-2896197 002-90753



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.95 | 0.92 | 0.89 | 0.86 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Factor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 72 |
| B16 | 115 |
| C10 | 106 |
| C16 | 170 |

Components

MOUNTING SET trimless for soft acoustic ceilings

| | | |
|---------------|--------|-------------------|
| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
| traffic white | 64 | 048-2896197 |



POWER SUPPLY

| | |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 147-33-23 | 002-90753 |

Optional electrical accessories

DIN RAIL POWER SUPPLY

| | |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 72-90-63 | 005-6520210 |



DIN RAIL LED DRIVER

| | | |
|------------------------------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| 2×42W 48V DC UOUT 10–40V | 36-88-59 | 005-6121030 |

