

SASSO 40 round adjustable trimless soft acoustic ceiling


048-2820619S 048-2896197 002-90753



Project / Type

Notes

Count / Date

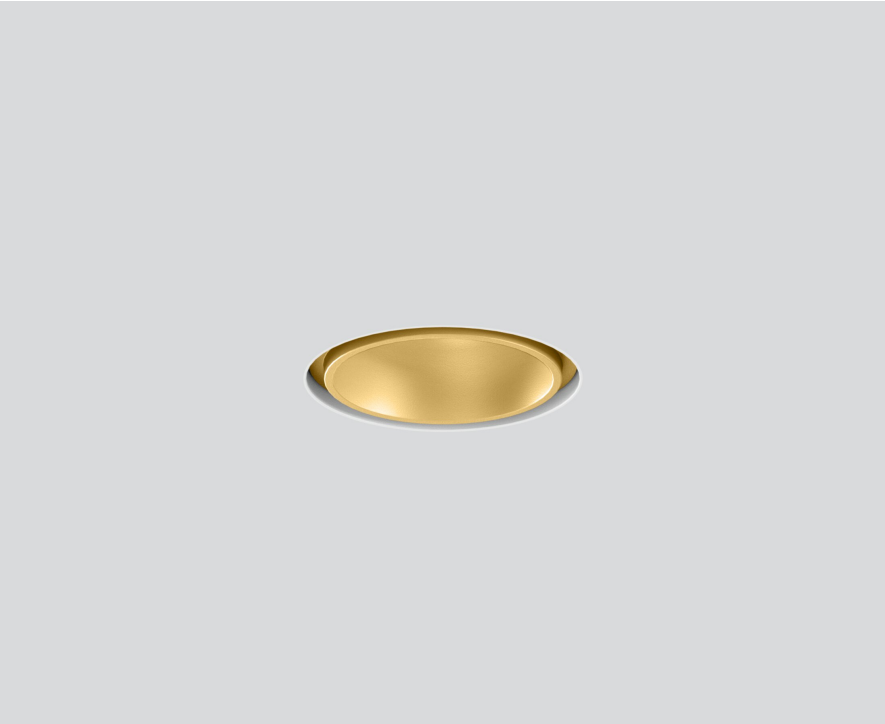

General
Ceiling Recessed
tilt max 30°
rotation 360°
gold dust RAL 260-M ¹
Mounting set traffic white
front IP40 back IP20
404 lm
fixture 79 lm/W ²

LED
4000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 94 R _r : 87 R _{f(1-15)} : 90
MR 0.86 MDER 0.78

Optical
spot beam angle 14°
UGR ≤ 10
PstLM ≤ 1.0 ³ SVM ≤ 0.4 ³


Electrical
DALI-2
PC2 220-240 V
system 6.2 W fixture 5.1 W
12 Vf 450 mA

Physical
trimless
diameter 56 mm height 50 mm

Cutout
diameter 58 mm
recessed depth 140 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions

Lighting calculator

