

SOUNDCATCHER soft

square 1000 sensor light

acoustic

suspended


091-31806B7R 091-312120D



Project / Type _____


Notes _____

Count / Date _____

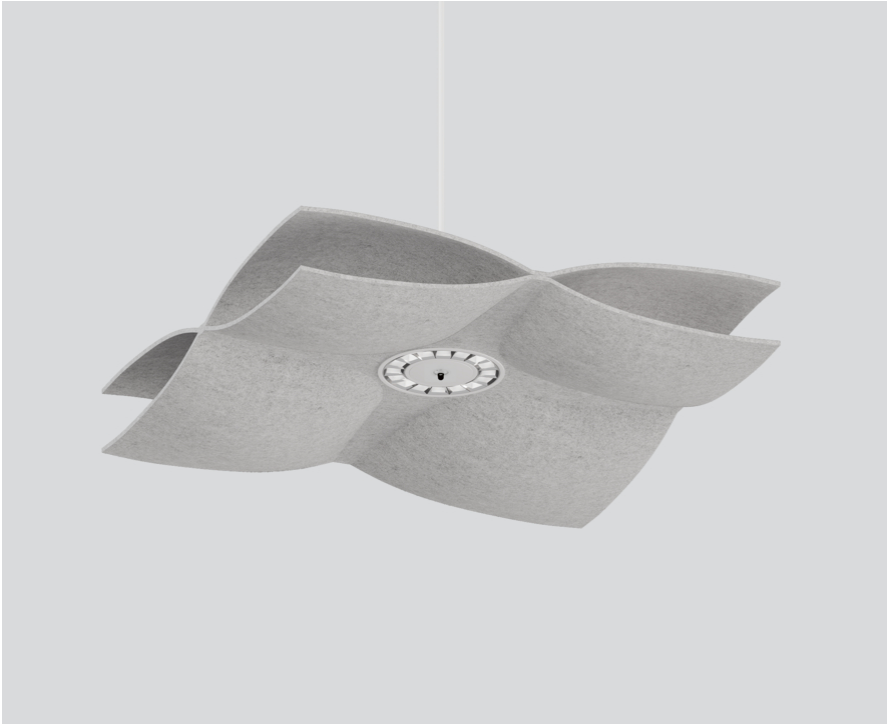

Acoustic element made of high quality, self-supporting, at least 50 % recycled PET felt with sound absorbing properties; in different moldings; constructed of two layers; choice of square, round or octagonal design; suitable for single or group installation; high quality visual and tactile surface; acoustically effective cavities; large sound absorbing surface; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with MITA circle 240 acoustic suspended (LUMINAIRE or BLIND SUSPENSION); LUMINAIRE: ring shaped luminaire housing in die-cast aluminium; extremely slim design; surface powder coated; suspended; with height adjustable rod suspension (chrome), feed in rod; electronic operating unit installed in the canopy; high gloss reflector with faceted design; energy-efficient LEDs with very good colour rendering; optionally with sensor

Light distribution



Product drawing



General

traffic white | RAL 9016 ¹ _____

marble grey _____

PET felt (made of at least 50% post-consumer recycled material) _____

IP20 _____

2210 lm _____

LED

4000 K _____

CRI ≥ 80 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

MR 0.72 | MDER 0.65 _____

Optical

Reflector chrome | symmetric _____

UGR ≤ 19 | ≥65° <1500 cd/m² _____

PstLM ≤ 1.0 ² | SVM ≤ 0.4 ² _____

Electrical

DALI-2 ESSENTIAL sensor | 1 DALI Addr. _____

brightness & presence _____

PC1 | 220-240 V _____

system 13.7 W _____

system 161 lm/W ³ _____

Physical

rod 977 mm _____

diameter 240 mm | height 45 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency



SOUNDCATCHER soft square 1000 sensor light acoustic

suspended

091-31806B7R 091-312120D



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	72
B16	115
C10	106
C16	170

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.5	0.9	1.3	1.7	1.8	2.1

Components

SOUNDCATCHER soft square

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1000-1000-154	091-312120D

Mounting accessories

SYSTEM CONNECTOR

TYPE	COLOUR	ARTICLE NUMBER(S)
set of two connectors	traffic white	091-3191007
set of two connectors	jet black	091-3191008



['091-31806B7R 091-312120D'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

07.06.2025

2 / 2