

NOBA 40 suspended canopy ceiling

049-53101178W 005-2601218



Project / Type

Notes

Count / Date




Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

Light distribution



| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 614 | 1.37 |
| 2 | 154 | 2.74 |
| 3 | 68 | 4.12 |
| 4 | 38 | 5.49 |
| 5 | 25 | 6.86 |

Product drawing

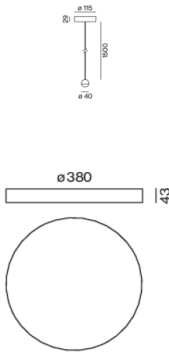

General

Ceiling | Suspended

traffic white | RAL 9016

Cable black

IP20

695 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

Rg: 98 | Rf: 90 | R[1-15]: 88

MR 0.8 | MDER 0.72

Optical

wide flood | beam angle 69°

PstLM ≤ 1.0 ¹ | SVM ≤ 0.4 ¹

Electrical

non DIM

PC3 | 220-240 V

system 6.5 W | fixture 4.9 W

system 107 lm/W ² | fixture 143 lm/W ³

36 Vf | 150 mA

Physical

diameter 40 mm | height 40 mm

cable length 2500 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency
³ incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

