

# ENVIVA louver direct / indirect


suspended  
067-02151B78X



Project / Type

Notes

Count / Date

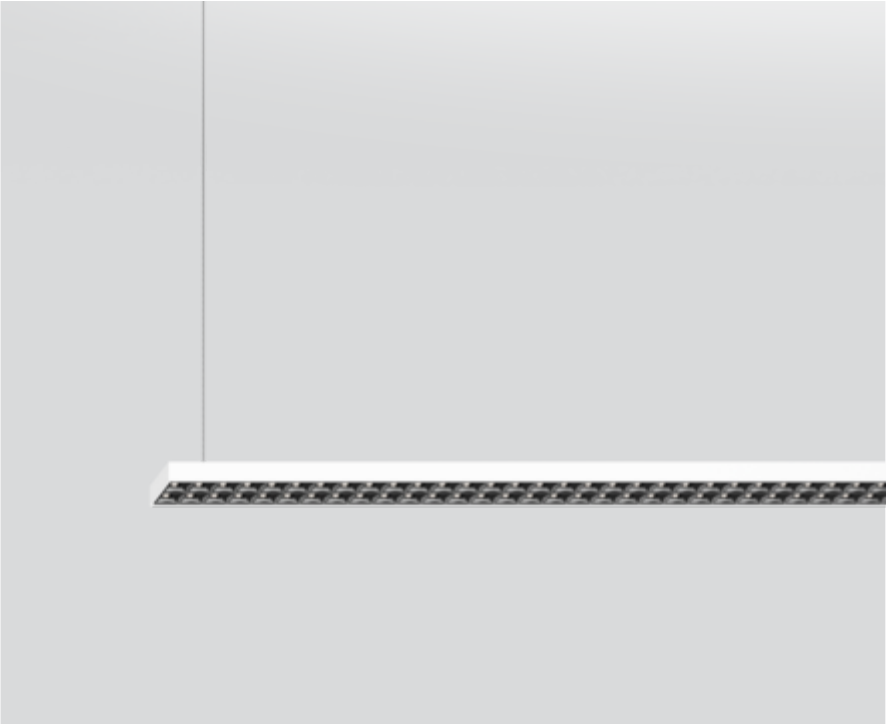

General
traffic white   RAL 9016 <sup>1</sup>
Inset black
Cable white
IP20
indirect 2880 lm   direct 3010 lm
total 5890 lm
fixture 165 lm/W <sup>2</sup>


LED
4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 99   R <sub>r</sub> : 92   R <sub>t(1-15)</sub> : 90
MR 0.81   MDER 0.74

Optical
super wide flood
UGR ≤ 13   ≥65° <1500 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>3 4</sup>   SVM ≤ 0.4 <sup>3 4</sup>


Electrical
DALI-2 essential sensor   1 DALI Addr.
brightness & presence
PC2   42 V
system 41 W   fixture 36 W
47 mA

Physical
length 1545 mm   width 45 mm   height 15.4 mm

## Light distribution



## Product drawing



<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> 850mA <sup>4</sup> Value of containing product at full load (undimmed)

## Installation instructions

