

# ENVIVA spotlight direct / indirect


suspended  
067-12150B79W



Project / Type


Notes

Count / Date

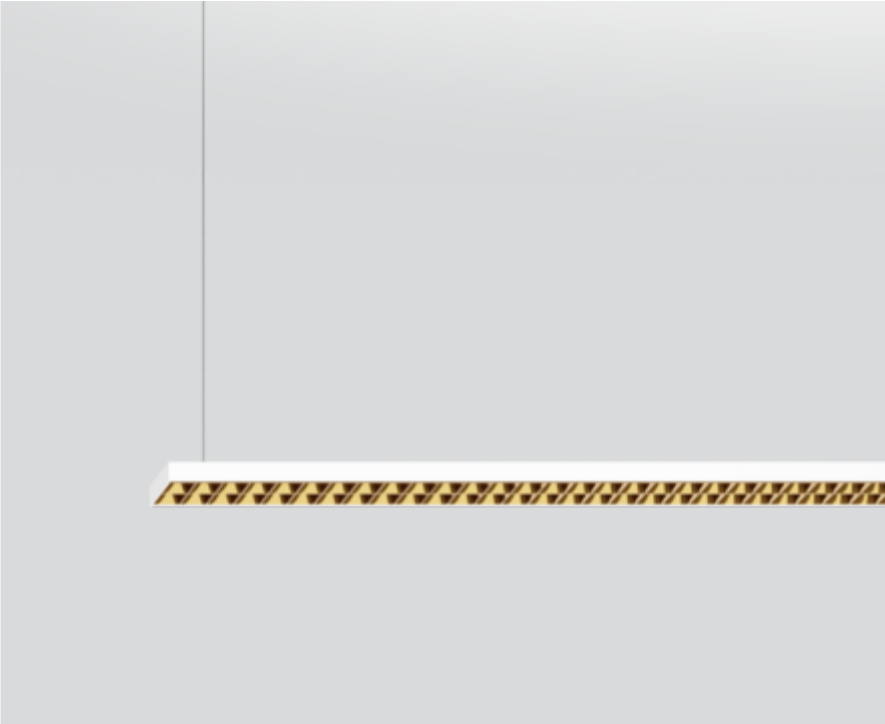

Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 x 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

## Light distribution



## Product drawing



## General

traffic white | RAL 9016 <sup>1</sup>

Inset gold

Cable white

IP20

indirect 2800 lm | direct 2860 lm

total 5660 lm

fixture 150 lm/W <sup>2</sup>

## LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 | R<sub>r</sub>: 91 | R<sub>(1-15)</sub>: 89

MR 0.61 | MDER 0.55

## Optical

spotline

UGR ≤ 10 | ≥ 65° < 1500 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>3 4</sup> | SVM ≤ 0.4<sup>3 4</sup>

## Electrical

DALI-2 essential sensor | 1 DALI Addr.

brightness & presence

PC2 | 42 V

system 43 W | fixture 38 W

50 mA

## Physical

length 1545 mm | width 45 mm | height 15.4 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> 900mA <sup>4</sup> Value of containing product at full load (undimmed)

## Installation instructions



# ENVIVA spotline direct / indirect

suspended  
067-12150B79W



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	37
B16	60
C10	37
C16	60

## Mounting accessories

### CANOPY

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic white	112-112-35	005-2611037
jet black	112-112-35	005-2611038
traffic white	112-112-35	005-2611137
jet black	112-112-35	005-2611138

