

# ENVIVA spotline direct / indirect

suspended


067-12141B79W



Project / Type

Notes

Count / Date

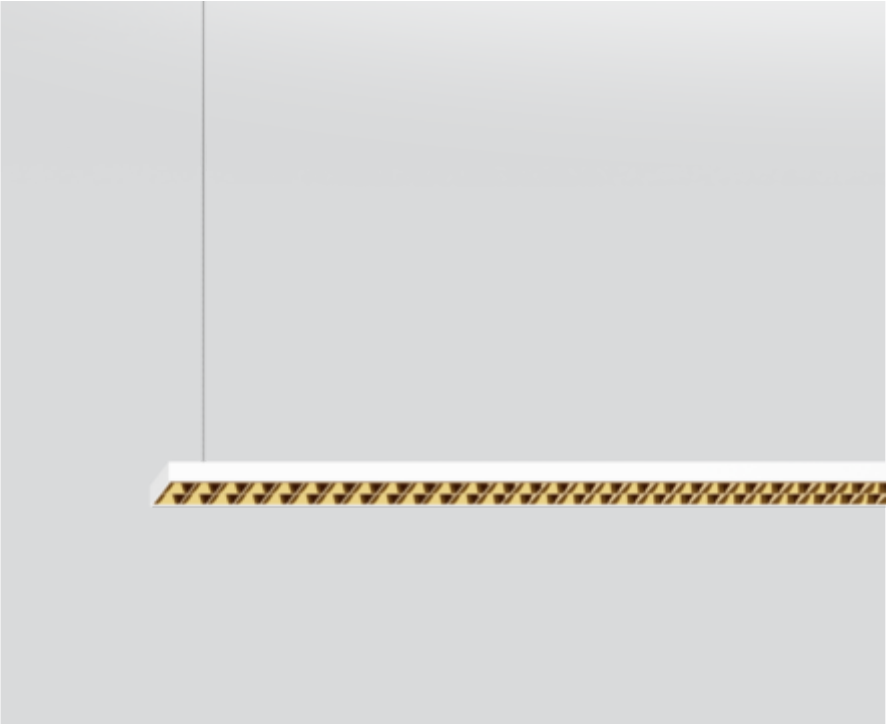

Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 x 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

## Product drawing



### General

traffic white | RAL 9016 <sup>1</sup>

Inset gold

Cable white

IP20

indirect 3030 lm

### LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 | R<sub>f</sub>: 92 | R<sub>t(1-15)</sub>: 90

MR 0.81 | MDER 0.74

### Optical

spotline

PstLM ≤ 1.0<sup>2</sup> <sup>3</sup> | SVM ≤ 0.4<sup>2</sup> <sup>3</sup>

### Electrical

DALI-2 essential sensor | 1 DALI Addr.

brightness & presence

PC2 | 42 V

system 44 W | fixture 38 W

56 mA

### Physical

length 1245 mm | width 45 mm | height 15.4 mm

<sup>1</sup> RAL code <sup>2</sup> 900mA  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions

