

ENVIVA spotline direct / indirect


suspended
067-12140B78W



Project / Type

Notes

Count / Date

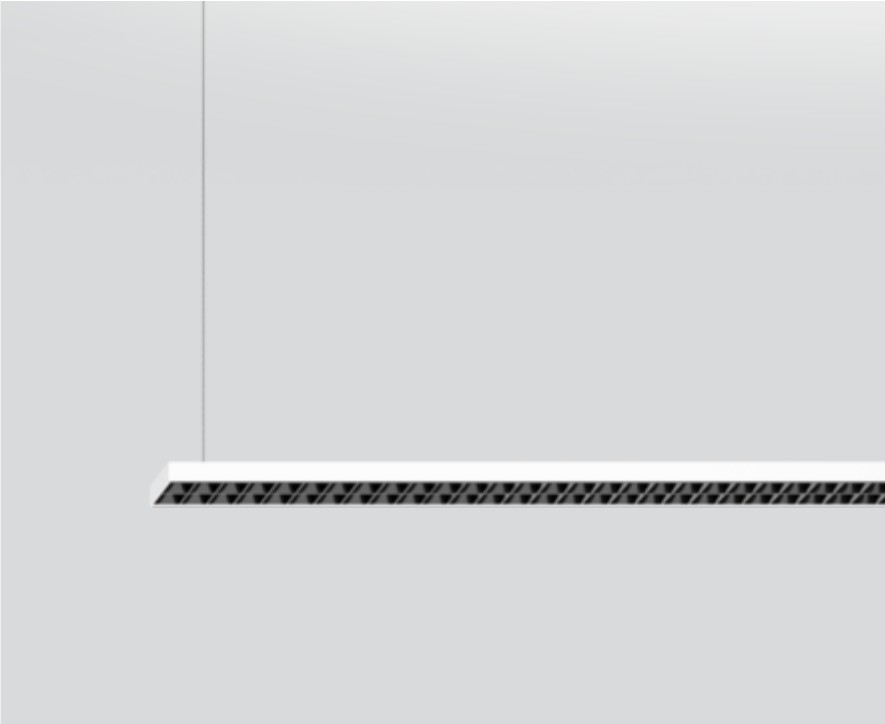

Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 x 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

Product drawing



General

traffic white | RAL 9016 ¹
Inset jet black
Cable white
IP20
indirect 2800 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 | R_f: 91 | R_{f(1-15)}: 89
MR 0.61 | MDER 0.55

Optical

spotline
PstLM ≤ 1.0² ³ | SVM ≤ 0.4² ³

Electrical

DALI-2 essential sensor | 1 DALI Addr.
brightness & presence
PC2 | 42 V
system 44 W | fixture 38 W
56 mA

Physical

length 1245 mm | width 45 mm | height 15.4 mm

¹ RAL code ² 900mA
³ Value of containing product at full load (undimmed)

Installation instructions

