

SPOTLINE


MOVE IT PRO 45
086-6320D34W



Project / Type


Notes

Count / Date

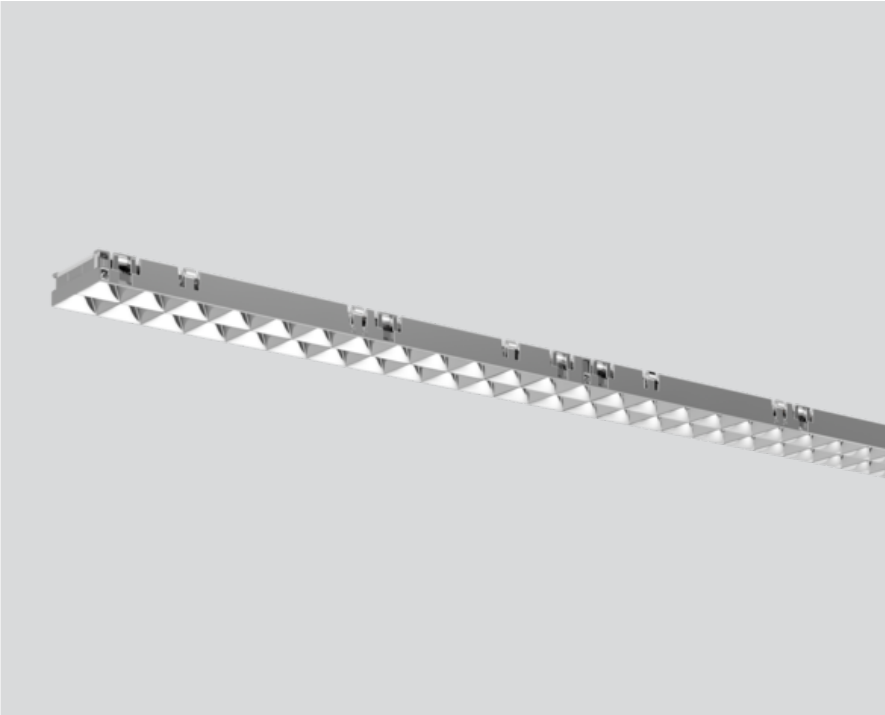

Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; for linear tracks; power supplied via MOVE IT PRO 45 system track profile; surface chrome; fitted with single LED light points; good glare control through recessed light point level; inserted lenses with wide flood radiation characteristic; for use in schools, retail and offices; $UGR \leq 19$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; light colour 2700 - 6500 K tunable white; $\leq 3 \text{ SDCM}$ (initial MacAdam); $CRI \geq 90$; min. 90% of luminous flux after 100000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling | Track

spot line inset

chrome

IP20

3510 lm

2340 lm/m

LED

tunable white | 2700 - 6500 K

$CRI \geq 90$

L90 / 100000 h

$\leq 3 \text{ SDCM}$ (initial MacAdam)

$R_g: 101 \mid R_f: 90 \mid R_{f(1-15)}: 88$

MR 0.51 | MDER 0.46

Optical

wide flood

$UGR \leq 19 \mid \geq 65^\circ < 1500 \text{ cd/m}^2$

$PstLM \leq 1.0^1 \text{ } ^2 \text{ } ^3 \text{ } ^4 \mid SVM \leq 0.4^1 \text{ } ^2 \text{ } ^3 \text{ } ^4$

Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 29.0 W

system 121 lm/W⁵

19 W/m

Physical

length 1500 mm | width 43 mm | height 13 mm

¹ tunable white 2700 K - 6500 K² 6500 K³ 2700 K
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

