

SETA linear direct / indirect power

suspended system


074-5036638R



Project / Type _____

Notes _____

Count / Date _____

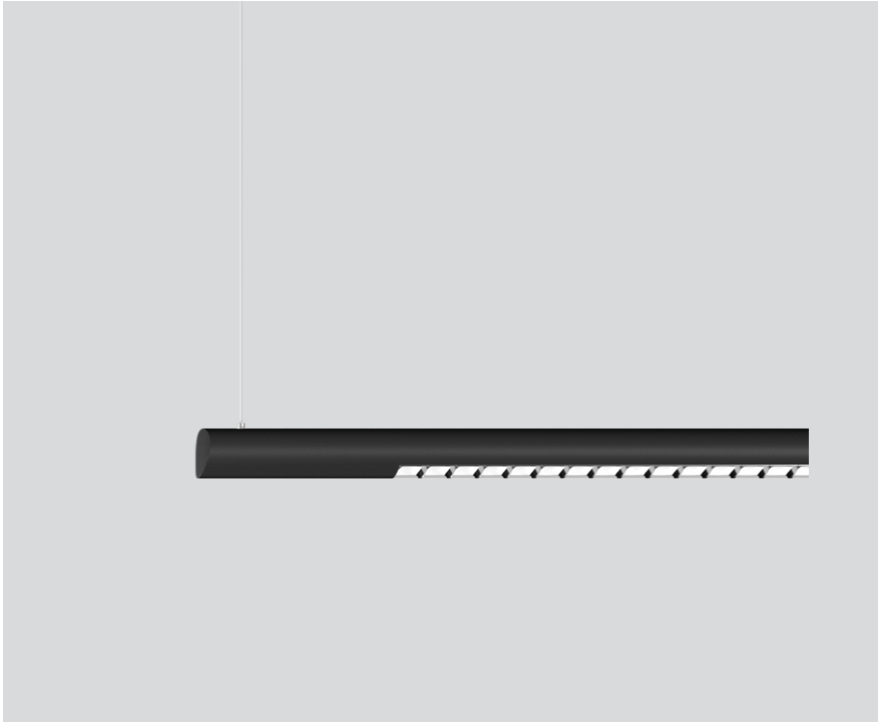

General

Ceiling , Suspended
 black , RAL9005 ¹
 Reflector chrome
 IP20
 indirect 4220 lm
 direct 3610 lm
 total 7830 lm

LED

4000 K
 CRI ≥ 80
 L90 / 50000 h
 initial MacAdam ≤ 3 SDCM
 MR 0.72
 MDER 0.65

Optical

Reflector
 Symmetric
 UGR < 13 , ≥65° <1500 cd/m²

Electrical


DALI-2
 51 W
 PC1 220-240V
 154 lm/W
 2 DALI Addr.

Physical


length 1700 mm
 width 60 mm
 height 60 mm

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 61 mm) linear; converter integrated into luminaire housing; no visible screws; for lighting systems; surface black powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated tool-less suspension height adjustment; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; degree of protection IP20; PC1 220-240V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code

Installation instructions



Lighting calculator



SETA linear direct / indirect power

suspended system

074-5036638R



Project / Type

Notes

Count / Date

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 15 |
| B13 | 20 |
| B16 | 25 |
| B20 | 31 |
| C10 | 26 |
| C13 | 33 |
| C16 | 42 |
| C20 | 52 |

MOUNTING

END CAPS

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|--------|--------|-------------------|
| white | 60 | 074-5090017 |
| black | 60 | 074-5090018 |



MOUNTING

LINEAR CONNECTOR

| ARTICLE NUMBER(S) |
|-------------------|
| 074-5091110 |
| 074-6091120 |



CORNER CONNECTOR

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|--------|------------|-------------------|
| 90° incl. through wire 5 × 1.5 mm ² | white | 60-250-250 | 074-5091217 |
| 90° incl. through wire 5 × 1.5 mm ² | black | 60-250-250 | 074-5091218 |



SETA linear direct / indirect power

suspended system

074-5036638R



Project / Type

Notes

Count / Date

MOUNTING

CEILING FASTENER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 10 | 050-2041217 |
| jet black | 10 | 050-2041218 |



CABLE SUSPENSION

| COLOUR | ARTICLE NUMBER(S) |
|--------|-------------------|
| chrome | 005-2152110 |



CANOPY / FEEDER CABLE

| TYPE | COLOUR | ARTICLE NUMBER(S) |
|-------------------------|------------|-------------------|
| 5 x 1,5 mm ² | pure white | 005-2212417 |
| 5 x 1,5 mm ² | jet black | 005-2212418 |



THROUGH WIRE

| TYPE | ARTICLE NUMBER(S) |
|-------------------------------------|-------------------|
| 5 x 1,5 mm ² 10 pieces | 004-90005 |



OPTICAL

BLIND COVER

| TYPE | COLOUR | ARTICLE NUMBER(S) |
|--------|--------|-------------------|
| 250 mm | white | 074-5099107 |
| 250 mm | black | 074-5099108 |
| 500 mm | white | 074-5099117 |
| 500 mm | black | 074-5099118 |

