




Types



Light distributions




UNICO L4 / L6 basic

ceiling

EN Rectangular surface mounted multi-downlight made of aluminium; equipped with four (L4) / six (L6) individually selectable or prespecified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Rechteckiger Anbau-Multi-Downlight aus Aluminium; bestückt mit vier (L4) / sechs (L6) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei




black & chrome reflector



one luminaire multiple scenes




tunable white 2700 – 5000 K (optional)



UNICO L4 basic high efficient ceiling

CRI ≥ 90 · 2 SDCM · UGR ≤ 19 · cd/m² ≤ 3000 · 220-240 V · DALI 1 ADDR. · X-PERT



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1750 lm	114 lm/W	0 9 0 - 1 L 4 9 ◆ C ◪ ■ 1 1
	3000 K	1750 lm	114 lm/W	0 9 0 - 1 L 4 0 ◆ C ◪ ■ 1 1
	3500 K	1830 lm	120 lm/W	0 9 0 - 1 L 4 2 ◆ C ◪ ■ 1 1
	4000 K	1860 lm	122 lm/W	0 9 0 - 1 L 4 1 ◆ C ◪ ■ 1 1

WIDE FLOOD ROUND 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1800 lm	118 lm/W	0 9 0 - 1 L 4 9 ◆ D ◪ ■ 1 1
	3000 K	1800 lm	118 lm/W	0 9 0 - 1 L 4 0 ◆ D ◪ ■ 1 1
	3500 K	1880 lm	123 lm/W	0 9 0 - 1 L 4 2 ◆ D ◪ ■ 1 1
	4000 K	1920 lm	125 lm/W	0 9 0 - 1 L 4 1 ◆ D ◪ ■ 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1840 lm	120 lm/W	0 9 0 - 1 L 4 9 ◆ F ◪ ■ 1 1
	3000 K	1840 lm	120 lm/W	0 9 0 - 1 L 4 0 ◆ F ◪ ■ 1 1
	3500 K	1920 lm	125 lm/W	0 9 0 - 1 L 4 2 ◆ F ◪ ■ 1 1
	4000 K	1960 lm	128 lm/W	0 9 0 - 1 L 4 1 ◆ F ◪ ■ 1 1


WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1890 lm	124 lm/W	0 9 0 - 1 L 4 9 ◆ G ◪ ■ 1 1
	3000 K	1890 lm	124 lm/W	0 9 0 - 1 L 4 0 ◆ G ◪ ■ 1 1
	3500 K	1970 lm	129 lm/W	0 9 0 - 1 L 4 2 ◆ G ◪ ■ 1 1
	4000 K	2010 lm	131 lm/W	0 9 0 - 1 L 4 1 ◆ G ◪ ■ 1 1



UNICO L4 basic ceiling

CRI ≥ 90 · UGR ≤ 10 · cd/m² ≤ 1500 · 220-240 V · DALI 1 ADDR. · X-PERT



SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1100 lm	57 lm/W	0 9 0 - 1 L 4 4 ◆ K ◪ 0 0 1
	3000 K	1180 lm	61 lm/W	0 9 0 - 1 L 4 5 ◆ K ◪ 0 0 1
	4000 K	1260 lm	65 lm/W	0 9 0 - 1 L 4 6 ◆ K ◪ 0 0 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1120 lm	58 lm/W	0 9 0 - 1 L 4 4 ⇕ N ◪ 0 0 1
	3000 K	1200 lm	62 lm/W	0 9 0 - 1 L 4 5 ⇕ N ◪ 0 0 1
	4000 K	1280 lm	66 lm/W	0 9 0 - 1 L 4 6 ⇕ N ◪ 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1500 lm	78 lm/W	0 9 0 - 1 L 4 4 ⇕ B ◪ ■ 0 1
	3000 K	1600 lm	83 lm/W	0 9 0 - 1 L 4 5 ⇕ B ◪ ■ 0 1
	4000 K	1710 lm	89 lm/W	0 9 0 - 1 L 4 6 ⇕ B ◪ ■ 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1720 lm	89 lm/W	0 9 0 - 1 L 4 4 ⇕ C ◪ ■ 0 1
	3000 K	1840 lm	95 lm/W	0 9 0 - 1 L 4 5 ⇕ C ◪ ■ 0 1
	4000 K	1970 lm	102 lm/W	0 9 0 - 1 L 4 6 ⇕ C ◪ ■ 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1710 lm	89 lm/W	0 9 0 - 1 L 4 4 ⇕ D ◪ ■ 0 1
	3000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 5 ⇕ D ◪ ■ 0 1
	4000 K	1950 lm	101 lm/W	0 9 0 - 1 L 4 6 ⇕ D ◪ ■ 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1470 lm	76 lm/W	0 9 0 - 1 L 4 4 ⇕ E ◪ ■ 0 1
	3000 K	1570 lm	81 lm/W	0 9 0 - 1 L 4 5 ⇕ E ◪ ■ 0 1
	4000 K	1680 lm	87 lm/W	0 9 0 - 1 L 4 6 ⇕ E ◪ ■ 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1750 lm	91 lm/W	0 9 0 - 1 L 4 4 ⇕ F ◪ ■ 0 1
	3000 K	1870 lm	97 lm/W	0 9 0 - 1 L 4 5 ⇕ F ◪ ■ 0 1
	4000 K	2000 lm	104 lm/W	0 9 0 - 1 L 4 6 ⇕ F ◪ ■ 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1800 lm	93 lm/W	0 9 0 - 1 L 4 4 ⇕ G ◪ ■ 0 1
	3000 K	1920 lm	99 lm/W	0 9 0 - 1 L 4 5 ⇕ G ◪ ■ 0 1
	4000 K	2060 lm	107 lm/W	0 9 0 - 1 L 4 6 ⇕ G ◪ ■ 0 1

Order options

CONTROL ⇕		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1520 lm	79 lm/W	0 9 0 - 1 L 4 4 ◆ A ◪ 0 0 1
	3000 K	1620 lm	84 lm/W	0 9 0 - 1 L 4 5 ◆ A ◪ 0 0 1
	4000 K	1740 lm	90 lm/W	0 9 0 - 1 L 4 6 ◆ A ◪ 0 0 1


WALL FLOOR CORRIDOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1590 lm	82 lm/W	0 9 0 - 1 L 4 4 ◆ W ◪ ■ 0 1
	3000 K	1690 lm	88 lm/W	0 9 0 - 1 L 4 5 ◆ W ◪ ■ 0 1
	4000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 6 ◆ W ◪ ■ 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1590 lm	82 lm/W	0 9 0 - 1 L 4 4 ◆ W ◪ ■ 0 2
	3000 K	1690 lm	88 lm/W	0 9 0 - 1 L 4 5 ◆ W ◪ ■ 0 2
	4000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 6 ◆ W ◪ ■ 0 2





UNICO L6 basic high efficient ceiling



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2640 lm	115 lm/W	0 9 0 - 1 L 6 9 ◆ C ◪ ■ 1 1
	3000 K	2640 lm	115 lm/W	0 9 0 - 1 L 6 0 ◆ C ◪ ■ 1 1
	3500 K	2750 lm	120 lm/W	0 9 0 - 1 L 6 2 ◆ C ◪ ■ 1 1
	4000 K	2810 lm	122 lm/W	0 9 0 - 1 L 6 1 ◆ C ◪ ■ 1 1

WIDE FLOOD ROUND 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2720 lm	118 lm/W	0 9 0 - 1 L 6 9 ◆ D ◪ ■ 1 1
	3000 K	2720 lm	118 lm/W	0 9 0 - 1 L 6 0 ◆ D ◪ ■ 1 1
	3500 K	2830 lm	123 lm/W	0 9 0 - 1 L 6 2 ◆ D ◪ ■ 1 1
	4000 K	2890 lm	126 lm/W	0 9 0 - 1 L 6 1 ◆ D ◪ ■ 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2780 lm	121 lm/W	0 9 0 - 1 L 6 9 ◆ F ◪ ■ 1 1
	3000 K	2780 lm	121 lm/W	0 9 0 - 1 L 6 0 ◆ F ◪ ■ 1 1
	3500 K	2890 lm	126 lm/W	0 9 0 - 1 L 6 2 ◆ F ◪ ■ 1 1
	4000 K	2950 lm	128 lm/W	0 9 0 - 1 L 6 1 ◆ F ◪ ■ 1 1

Order options

◆ CONTROL		◪ COLOUR		■ REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		


WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2850 lm	124 lm/W	0 9 0 - 1 L 6 9 ◆ G ◪ ■ 1 1
	3000 K	2850 lm	124 lm/W	0 9 0 - 1 L 6 0 ◆ G ◪ ■ 1 1
	3500 K	2970 lm	129 lm/W	0 9 0 - 1 L 6 2 ◆ G ◪ ■ 1 1
	4000 K	3030 lm	132 lm/W	0 9 0 - 1 L 6 1 ◆ G ◪ ■ 1 1



UNICO L6 basic ceiling





SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	1610 lm	59 lm/W	0 9 0 - 1 L 6 4 ◆ K ◪ 0 0 1
	3000 K	1710 lm	63 lm/W	0 9 0 - 1 L 6 5 ◆ K ◪ 0 0 1
	4000 K	1840 lm	68 lm/W	0 9 0 - 1 L 6 6 ◆ K ◪ 0 0 1

NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	1630 lm	60 lm/W	0 9 0 - 1 L 6 4 ◆ N ◪ 0 0 1
	3000 K	1740 lm	64 lm/W	0 9 0 - 1 L 6 5 ◆ N ◪ 0 0 1
	4000 K	1870 lm	69 lm/W	0 9 0 - 1 L 6 6 ◆ N ◪ 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2180 lm	80 lm/W	0 9 0 - 1 L 6 4 ◆ B ◪ ■ 0 1
	3000 K	2320 lm	86 lm/W	0 9 0 - 1 L 6 5 ◆ B ◪ ■ 0 1
	4000 K	2490 lm	92 lm/W	0 9 0 - 1 L 6 6 ◆ B ◪ ■ 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2510 lm	93 lm/W	0 9 0 - 1 L 6 4 ◆ C ◪ ■ 0 1
	3000 K	2670 lm	99 lm/W	0 9 0 - 1 L 6 5 ◆ C ◪ ■ 0 1
	4000 K	2870 lm	106 lm/W	0 9 0 - 1 L 6 6 ◆ C ◪ ■ 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2480 lm	92 lm/W	0 9 0 - 1 L 6 4 ◆ D ◪ ■ 0 1
	3000 K	2650 lm	98 lm/W	0 9 0 - 1 L 6 5 ◆ D ◪ ■ 0 1
	4000 K	2840 lm	105 lm/W	0 9 0 - 1 L 6 6 ◆ D ◪ ■ 0 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2140 lm	79 lm/W	0 9 0 - 1 L 6 4 ⇕ E ◪ ■ 0 1
	3000 K	2280 lm	84 lm/W	0 9 0 - 1 L 6 5 ⇕ E ◪ ■ 0 1
	4000 K	2450 lm	90 lm/W	0 9 0 - 1 L 6 6 ⇕ E ◪ ■ 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2550 lm	94 lm/W	0 9 0 - 1 L 6 4 ⇕ F ◪ ■ 0 1
	3000 K	2720 lm	100 lm/W	0 9 0 - 1 L 6 5 ⇕ F ◪ ■ 0 1
	4000 K	2920 lm	108 lm/W	0 9 0 - 1 L 6 6 ⇕ F ◪ ■ 0 1

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2210 lm	82 lm/W	0 9 0 - 1 L 6 4 ⇕ R ◪ ■ 0 1
	3000 K	2360 lm	87 lm/W	0 9 0 - 1 L 6 5 ⇕ R ◪ ■ 0 1
	4000 K	2530 lm	93 lm/W	0 9 0 - 1 L 6 6 ⇕ R ◪ ■ 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2620 lm	97 lm/W	0 9 0 - 1 L 6 4 ⇕ G ◪ ■ 0 1
	3000 K	2790 lm	103 lm/W	0 9 0 - 1 L 6 5 ⇕ G ◪ ■ 0 1
	4000 K	3000 lm	111 lm/W	0 9 0 - 1 L 6 6 ⇕ G ◪ ■ 0 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2220 lm	82 lm/W	0 9 0 - 1 L 6 4 ⇕ A ◪ 0 0 1
	3000 K	2360 lm	87 lm/W	0 9 0 - 1 L 6 5 ⇕ A ◪ 0 0 1
	4000 K	2540 lm	94 lm/W	0 9 0 - 1 L 6 6 ⇕ A ◪ 0 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2310 lm	85 lm/W	0 9 0 - 1 L 6 4 ⇕ W ◪ ■ 0 1
	3000 K	2460 lm	91 lm/W	0 9 0 - 1 L 6 5 ⇕ W ◪ ■ 0 1
	4000 K	2640 lm	97 lm/W	0 9 0 - 1 L 6 6 ⇕ W ◪ ■ 0 1

Order options

CONTROL ⇕	
non DIM	1
DALI-2	3


COLOUR ◪	
gold dust RAL 260-M	9
jet black RAL 9005	B
white aluminium RAL 9006	G
traffic white RAL 9016	W

REFLECTOR ■	
chrome	0
black	B


Planning Information

L4 CEILING


SPOT ROUND




NARROW MEDIUM ROUND




MEDIUM ROUND




FLOOD ROUND




WIDE FLOOD ROUND




MEDIUM SQUARE




WIDE FLOOD SQUARE



WALLWASHER




WALL FLOOR CORRIDOR



4x wallwasher floor


WALL + FLOOR




4x wallwasher floor

L6 CEILING


SPOT ROUND




NARROW MEDIUM ROUND




MEDIUM ROUND




FLOOD ROUND




WIDE FLOOD ROUND




MEDIUM SQUARE




FLOOD SQUARE




RECTANGULAR MEDIUM




WIDE FLOOD SQUARE



WALLWASHER



WALL + FLOOR



6x wallwasher floor

New Babylon, The Hague

Netherlands

Architect
Studio Linse

Photographer
Kris Dekeijser



Used products



MINO 60 CIRCLE suspended




UNICO L4 / L6 recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


-2
parkeren
-2


-2

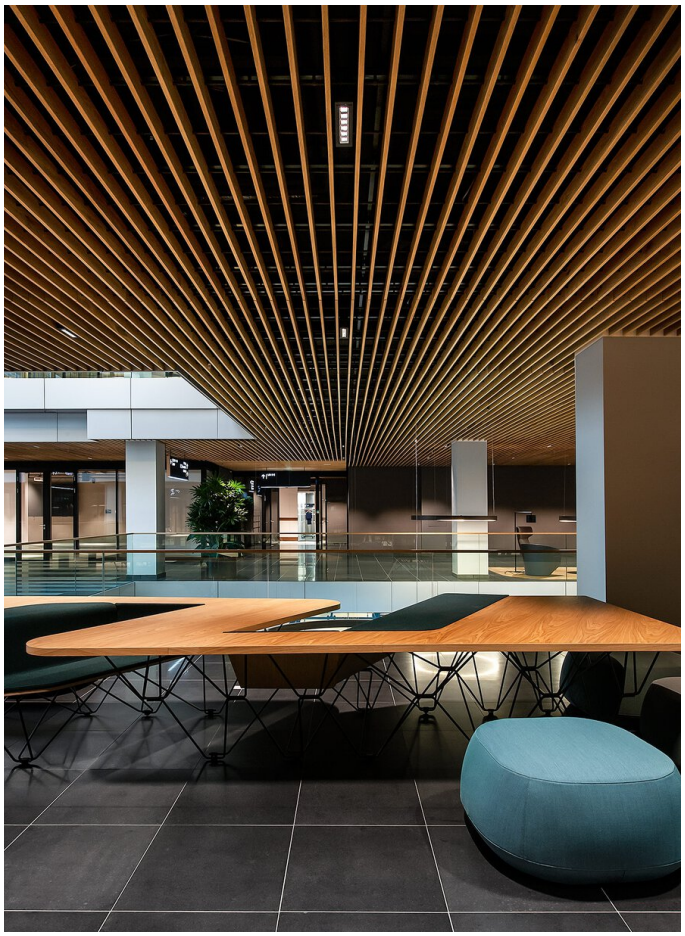

https://xal.com/en/experience-light/projects/pr/new-babylon-the-hague-382799



