

SASSO 60 round

ceiling


EN Cylindrical ceiling mounted spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; choice of adjustable symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise due to high quality lens system; with different beam angles; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (ADJUSTABLE); no multiple shadows; efficient LEDs with very good colour rendering; converter integrated into spotlight head

DE Zylindrischer Deckenanbaustrahler aus Aluminium; Oberfläche Lichteinsatz lackiert; Oberfläche Gehäuse pulverbeschichtet; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; wahlweise einstellbar symmetrische oder asymmetrische Abstrahlcharakteristik; symmetrisch strahlende Varianten: präzise durch hochwertige Linsenoptik; mit verschiedenen Ausstrahlwinkeln; asymmetrische strahlende Varianten: hochwertiger Reflektor mit mikrofacetierter, aluminiumbedampfter Oberfläche; COB (Chip on Board) Technologie für höchste Effizienz (ADJUSTABLE); keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Konverter im Strahlerkopf integriert

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam)
 UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
 up to 101 lm/W
 L80 / 50000 h, L85 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colour



Inner colour



Light distributions



wallwasher and wallwasher floor inset



glare control (UGR ≤ 16)



easy mounting no visible screws



Colour Warm Dimming 1800 – 3000 K (optional)



CRI ≥ 95 2 SDCM (optional)



SASSO 60 round adjustable ceiling



SPOT 15°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.4 W | 2700 K | 735 lm | 71 lm/W | 0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
| | 3000 K | 759 lm | 73 lm/W | 0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
| | 3500 K | 775 lm | 75 lm/W | 0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
| | 4000 K | 799 lm | 77 lm/W | 0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM 27°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.2 W | 2700 K | 874 lm | 86 lm/W | 0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
| | 3000 K | 907 lm | 89 lm/W | 0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
| | 3500 K | 927 lm | 91 lm/W | 0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
| | 4000 K | 946 lm | 93 lm/W | 0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.2 W | 2700 K | 831 lm | 81 lm/W | 0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
| | 3000 K | 862 lm | 85 lm/W | 0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
| | 3500 K | 880 lm | 86 lm/W | 0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
| | 4000 K | 899 lm | 88 lm/W | 0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.2 W | 2700 K | 876 lm | 86 lm/W | 0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 3000 K | 909 lm | 89 lm/W | 0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 3500 K | 928 lm | 91 lm/W | 0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 4000 K | 948 lm | 93 lm/W | 0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

Order options

| CONTROL | | COLOUR | | INNER COLOUR | |
|---------|---|------------------------|---|------------------------|---|
| non DIM | 1 | jet black RAL 9005 | 1 | jet black RAL 9005 | 1 |
| DALI-2 | 3 | traffic white RAL 9016 | 7 | matt silver | 4 |
| | | | | traffic white RAL 9016 | 7 |
| | | | | gold dust RAL 260-M | 9 |



SASSO 60 round wallwasher ceiling



WALLWASHER CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.4 W | 2700 K | 1000 lm | 96 lm/W | 0 4 8 - 3 7 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A |
| | 3000 K | 944 lm | 91 lm/W | 0 4 8 - 3 7 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A |
| | 3500 K | 983 lm | 95 lm/W | 0 4 8 - 3 7 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A |
| | 4000 K | 944 lm | 91 lm/W | 0 4 8 - 3 7 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A |

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour matt silver, traffic white.



SASSO 60 round wallwasher/floor ceiling



WALLWASHER FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 10.4 W | 2700 K | 1050 lm | 101 lm/W | 0 4 8 - 3 7 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 3000 K | 985 lm | 95 lm/W | 0 4 8 - 3 7 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 3500 K | 1030 lm | 99 lm/W | 0 4 8 - 3 7 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
| | 4000 K | 985 lm | 95 lm/W | 0 4 8 - 3 7 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |



Order options

| CONTROL | | COLOUR | | INNER COLOUR | |
|---------|---|------------------------|---|------------------------|---|
| non DIM | 1 | jet black RAL 9005 | 1 | jet black RAL 9005 | 1 |
| DALI-2 | 3 | traffic white RAL 9016 | 7 | matt silver | 4 |
| | | | | traffic white RAL 9016 | 7 |
| | | | | gold dust RAL 260-M | 9 |


The Silo, Copenhagen

Denmark

Architect
COBE Architects

Lighting Design
anker & co

Photographer
Kris Dekeijser

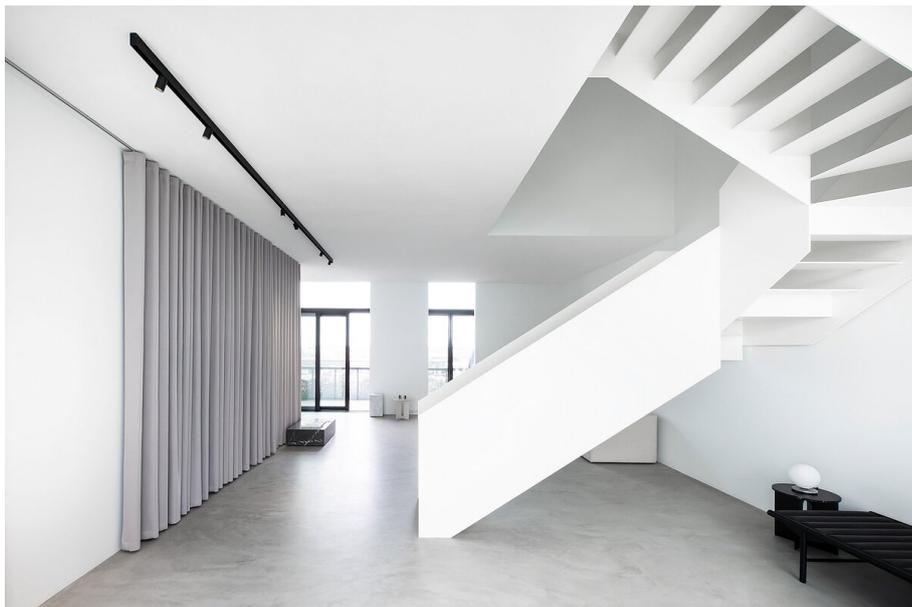

Used products



**MOVE IT 25 surface /
suspended system**





**JUST 45 MOVE IT
25 / 25 S / 45**



**SASSO 60 round
ceiling**



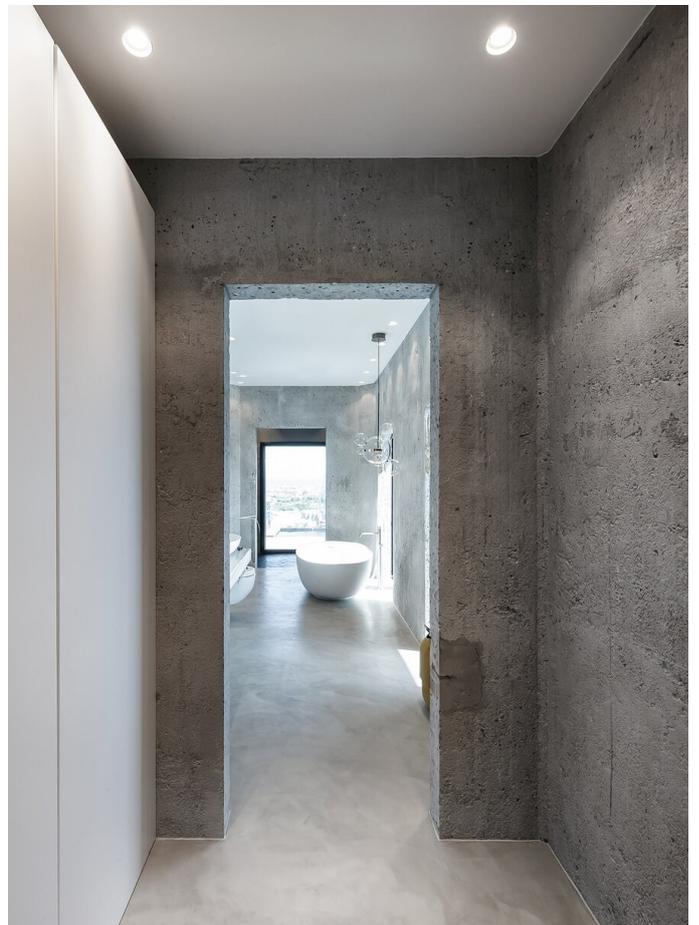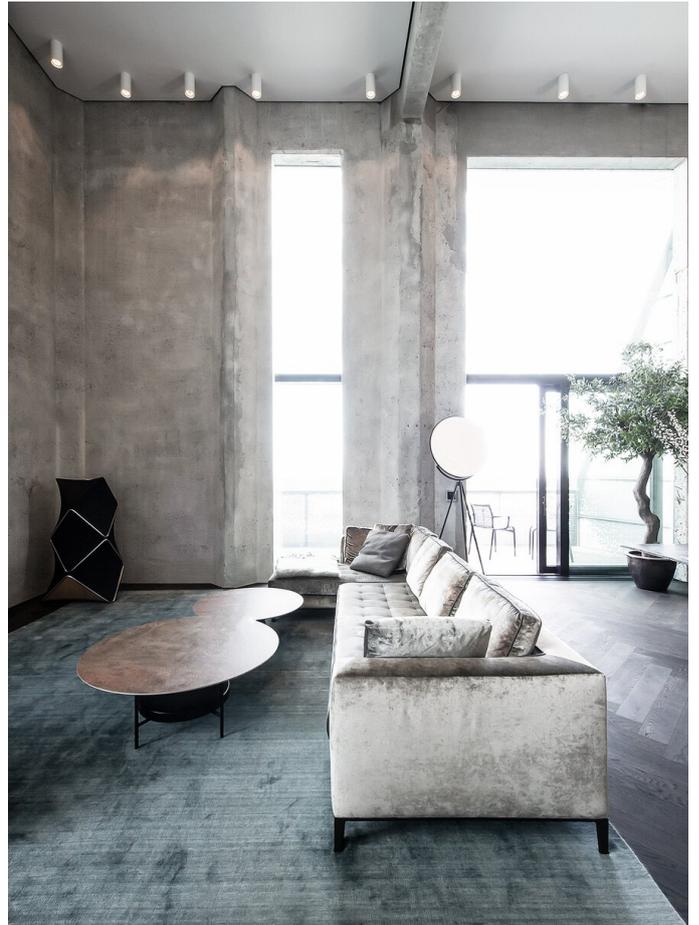



Bank Raiffeisen, Aigle

Switzerland

Architect

ABA PARTENAIRES SA

Photographer

Julie Masson



Used products



INO circle suspended



SASSO 60 round ceiling

