



TASK round

suspended


EN Round luminaire housing in aluminium; ultra low-profile design (only 15 mm); surface powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; incl. feeder cable or with height adjustable rod suspension (chrome), feed in rod; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; optional: indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; sound absorbing accessories available

DE Runder Leuchtenkörper aus Aluminium; extrem flache Bauform (nur 15 mm); Oberfläche pulverbeschichtet; abgependelt mit Seilabhangung; werkzeuggesteigliche Hohenverstellung an der Leuchte; inkl. Einspeiseleitung oder mit kurzbarer Pendelrohrabhangung (chrom), Einspeiseleitung in Pendelrohr; direkte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten gelenkt; Lichtlenkung mittels hochreflektierenden Reflektormaterials; optional: Indirektlichtanteil mit eigenen Platinen fur erhoheten Lichtstrom und maximale Deckenaufhellung; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin fur Weiterverdrahtung; schallabsorbierendes Zubehor erhaltlich

Quickinfo

3000 K, 4000 K
 CRI \geq 90 / 3 SDCM (initial MacAdam)
 UGR \leq 16, UGR \leq 19
 up to ↓ 9,370 lm / ↑ 4,370 lm
 up to 138 lm/W
 L90 / 50000 h
 DALI-2
 Microprismatic
 IP40

Types



Colour



Light distributions




DiiA® standards
 251, 252, 253




DIN EN 12464-1
 UGR \leq 19




direct / indirect
 illumination




acoustic
 elements



CRI \geq 98
 XPECTRUM
 (optional)

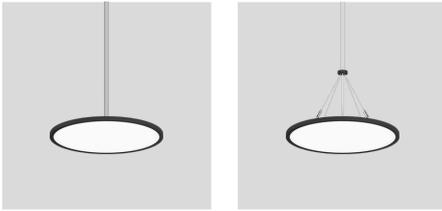


TASK 450 round suspended




MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.0 W	3000 K	1750 lm	109 lm/W	0 5 9 - 0 4 1 0 3 P
	4000 K	1860 lm	116 lm/W	0 5 9 - 0 4 1 1 3 P




MICROPRISMATIC | DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
37.0 W	3000 K	↓2710/↑1460 lm	113 lm/W	0 5 9 - 0 6 1 0 3 P
	4000 K	↓2880/↑1550 lm	120 lm/W	0 5 9 - 0 6 1 1 3 P


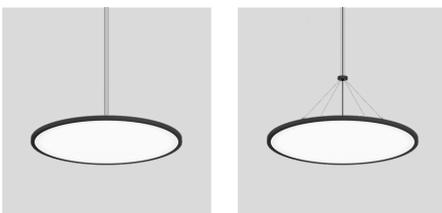


TASK 600 round suspended




MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.6 W	3000 K	3470 lm	117 lm/W	0 5 9 - 0 4 2 0 3 P
	4000 K	3690 lm	125 lm/W	0 5 9 - 0 4 2 1 3 P



MICROPRISMATIC | DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
44.0 W	3000 K	↓3470/↑1770 lm	119 lm/W	0 5 9 - 0 6 2 0 3 P
	4000 K	↓3690/↑1880 lm	127 lm/W	0 5 9 - 0 6 2 1 3 P


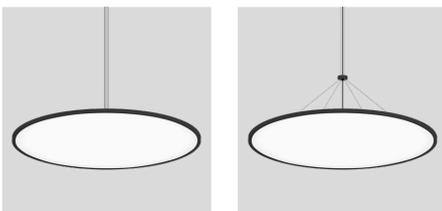


TASK 900 round suspended



MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
51.0 W	3000 K	6630 lm	130 lm/W	0 5 9 - 0 4 3 0 3 K
	4000 K	7060 lm	138 lm/W	0 5 9 - 0 4 3 1 3 K



MICROPRISMATIC | DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
100.0 W	3000 K	↓8800/↑4110 lm	129 lm/W	0 5 9 - 0 6 3 0 3 K
	4000 K	↓9370/↑4370 lm	137 lm/W	0 5 9 - 0 6 3 1 3 K

Order options

MOUNTING		COLOUR	
cable 1500 mm	2	special colours	X
rod 1000 mm	4	pure white RAL 9010	7
		jet black RAL 9005	8