
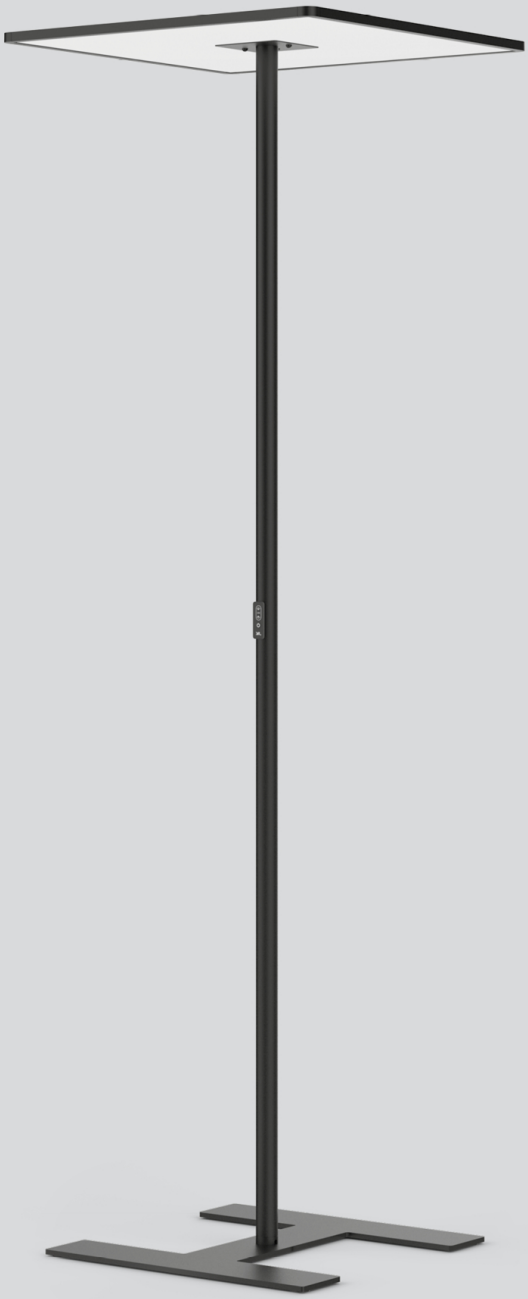


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10
up to ↓ 2,420 lm / ↑ 10,700 lm
up to 143 lm/W
L90 / 50000 h
stand alone ESSENTIAL sensor, touch DIM on pole
Microprismatic
IP20

Types



Colours



Light distributions



TASK square

free standing

EN Free standing luminaire with square luminaire head made of aluminium and rounded edges; ultra low-profile design (only 15 mm); steel round downpipe; pedestal with recess for table base; surface powder coated; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug


DE Stehleuchte mit quadratischem Leuchtenkopf aus Aluminium und abgerundeten Kanten; extrem flache Bauform (nur 15 mm); Stahlrohr rund; Standfuß mit Ausnehmung für Tischfuß; Oberfläche pulverbeschichtet; direkte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten gelenkt; Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; inkl. Anschlussleitung (3m) mit Schutzkontaktstecker



suitable for fourfold workstation



lighting control by touch DIM on pole



CRI ≥ 98
XPECTRUM
(optional)




TASK square free standing


CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
92.0 W	3000 K	↧2280/↥10000 lm	133 lm/W	059-293201 Z
	4000 K	↧2420/↥10700 lm	143 lm/W	059-293211 Z



Planning Information

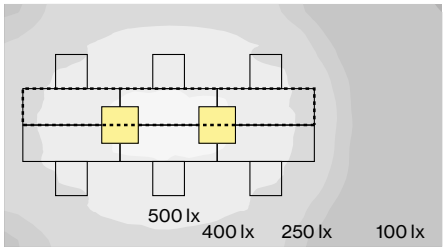



TASK square free standing
92 W, 4000 K, direct / indirect power

ROOM VALUES

Room dimensions	7.2 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	4.8 × 0.6 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

65° ≤ 3000 cd/m²

Order options

CONTROL	
touch DIM on pole	5
stand alone ESSENTIAL sensor	7

COLOUR	
white aluminium RAL 9006	6
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X

Office MyHammer

Germany

Architect
designfunktion
Gesellschaft für
moderne Einrichtung
Berlin mbH

Photographer
Werner Huthmacher



Used products



TASK square free standing

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



