

## LINEA


**EN** Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules

**DE** Leuchtenkörper und Frontabdeckung aus Aluminiumstrangpressprofil, kantige Ausführung; keine sichtbaren Schrauben; Oberfläche pulverbeschichtet; geeignet für Wandmontage; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige direkt/indirekte Lichtverteilung; HPO (High Performance Opal) Abdeckung für homogene Ausleuchtung; oder mit speziell berechneter, asymmetrischer Linse für homogene Beleuchtungsstärken (Montage wahlweise zur Boden- oder Deckenaufhellung); energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise JUST 26 Strahlereinsatz einsetzbar; optional mit Schalter für JUST 26 Strahlereinsätze

### Quickinfo

3000 K, 4000 K, tunable white  
2700 - 5000 K  
CRI  $\geq$  90, CRI  $\geq$  97 / 3 SDCM  
(initial MacAdam)  
up to  $\downarrow$  4,030 lm /  $\uparrow$  4,790 lm  
up to 125 lm/W  
L85 / 50000 h, L95 / 50000 h  
DALI-2, DALI-2 / DIM switch, non  
DIM, non DIM / ON/OFF switch  
High Performance Opal, High  
Performance Opal / Asymmetric  
IP20

### Types




### Colour




### Light distributions



system solution



CRI  $\geq$  98  
XPECTRUM  
(optional)




## LINEA wall



### OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↓428/±509 lm	105 lm/W	0 5 8 - 6 1 7 1 5 ⇄ A A
		4000 K	↓472/±562 lm	116 lm/W	0 5 8 - 6 1 7 1 6 ⇄ A A
17.6 W	610 mm	3000 K	↓881/±1050 lm	110 lm/W	0 5 8 - 6 1 7 2 5 ⇄ A A
		4000 K	↓972/±1160 lm	121 lm/W	0 5 8 - 6 1 7 2 6 ⇄ A A
20.9 W	610 mm	tunable w.	↓1010/±1200 lm	106 lm/W	0 5 8 - 6 1 7 2 D 3 A A
34.0 W	1210 mm	3000 K	↓1760/±2090 lm	113 lm/W	0 5 8 - 6 1 7 4 5 ⇄ A A
		4000 K	↓1940/±2310 lm	125 lm/W	0 5 8 - 6 1 7 4 6 ⇄ A A
41.0 W	1210 mm	tunable w.	↓2020/±2400 lm	108 lm/W	0 5 8 - 6 1 7 4 D 3 A A
68.0 W	2410 mm	3000 K	↓3520/±4190 lm	113 lm/W	0 5 8 - 6 1 7 8 5 ⇄ A A
		4000 K	↓3890/±4620 lm	125 lm/W	0 5 8 - 6 1 7 8 6 ⇄ A A
79.0 W	2410 mm	tunable w.	↓4030/±4790 lm	112 lm/W	0 5 8 - 6 1 7 8 D 3 A A



### OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↓428/±428 lm	96 lm/W	0 5 8 - 6 1 7 1 5 ⇄ A H
		4000 K	↓472/±472 lm	106 lm/W	0 5 8 - 6 1 7 1 6 ⇄ A H
17.6 W	610 mm	3000 K	↓881/±881 lm	100 lm/W	0 5 8 - 6 1 7 2 5 ⇄ A H
		4000 K	↓972/±972 lm	110 lm/W	0 5 8 - 6 1 7 2 6 ⇄ A H
20.9 W	610 mm	tunable w.	↓1010/±1010 lm	97 lm/W	0 5 8 - 6 1 7 2 D 3 A H
34.0 W	1210 mm	3000 K	↓1760/±1760 lm	104 lm/W	0 5 8 - 6 1 7 4 5 ⇄ A H
		4000 K	↓1940/±1940 lm	114 lm/W	0 5 8 - 6 1 7 4 6 ⇄ A H
41.0 W	1210 mm	tunable w.	↓2020/±2020 lm	99 lm/W	0 5 8 - 6 1 7 4 D 3 A H
68.0 W	2410 mm	3000 K	↓3520/±3520 lm	104 lm/W	0 5 8 - 6 1 7 8 5 ⇄ A H
		4000 K	↓3890/±3890 lm	114 lm/W	0 5 8 - 6 1 7 8 6 ⇄ A H
79.0 W	2410 mm	tunable w.	↓4030/±4030 lm	102 lm/W	0 5 8 - 6 1 7 8 D 3 A H

### Order options

CONTROL		CONTROL		CONTROL		COLOUR	
non DIM	1	DALI-2	3	non DIM / ON/OFF switch	2	pure white RAL 9010	7
DALI-2	3	DALI-2 / DIM switch	4	DALI-2	3	jet black RAL 9005	8
				DALI-2 / DIM switch	4		

MOUNTING	
spotlight left	B
spotlight right	C




## LINEA 1 spotlight wall



### OPAL / OPAL | 1 SPOTLIGHT 23°-30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.6 W	710 mm	3000 K	↓873/±873 lm	99 lm/W	0 5 8 - 6 1 7 2 5 ↕ ↗ ⌘ H
		4000 K	↓963/±963 lm	109 lm/W	0 5 8 - 6 1 7 2 6 ↕ ↗ ⌘ H
20.1 W	710 mm	↓ tunable w./ ↑2700 K - 5000 K	↓1000/±1000 lm	100 lm/W	0 5 8 - 6 1 7 2 D ↕ ↗ ⌘ H
34.0 W	1310 mm	3000 K	↓1760/±1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕ ↗ ⌘ H
		4000 K	↓1940/±1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕ ↗ ⌘ H
39.0 W	1310 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/±2010 lm	103 lm/W	0 5 8 - 6 1 7 4 D ↕ ↗ ⌘ H
68.0 W	2510 mm	3000 K	↓3490/±3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕ ↗ ⌘ H
		4000 K	↓3850/±3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕ ↗ ⌘ H
76.0 W	2510 mm	↓ tunable w./ ↑2700 K - 5000 K	↓4020/±4020 lm	106 lm/W	0 5 8 - 6 1 7 8 D ↕ ↗ ⌘ H

spotlight 1 x 2,6 W / 159 lm only with 3000 K; ON/OFF switch or DIM switch only controls the spotlight




## LINEA 2 spotlights wall



### OPAL / OPAL | 2 SPOTLIGHTS 23°-30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	1410 mm	3000 K	↓1760/±1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕ ↗ D H
		4000 K	↓1940/±1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕ ↗ D H
39.0 W	1410 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/±2010 lm	103 lm/W	0 5 8 - 6 1 7 4 D ↕ ↗ D H
68.0 W	2610 mm	3000 K	↓3490/±3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕ ↗ D H
		4000 K	↓3850/±3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕ ↗ D H
76.0 W	2610 mm	↓ tunable w./ ↑2700 K - 5000 K	↓4020/±4020 lm	106 lm/W	0 5 8 - 6 1 7 8 D ↕ ↗ D H

spotlights 2 x 2,6 W / 159 lm only with 3000K; ON/OFF switch or DIM switch only controls the spotlights



### Order options

CONTROL	CONTROL	CONTROL	COLOUR
non DIM	1 DALI-2	3 non DIM / ON/OFF switch	2 pure white RAL 9010
DALI-2	3 DALI-2 / DIM switch	4 DALI-2	3 jet black RAL 9005
		DALI-2 / DIM switch	4

MOUNTING	
spotlight left	B
spotlight right	C

# SNS Headquarters, Moscow

Russia

## Architect


Fedor Raschevsky, Peter  
Kholkovsky

## Lighting Design

Sergey Ananiev

## Photographer

Light&Design

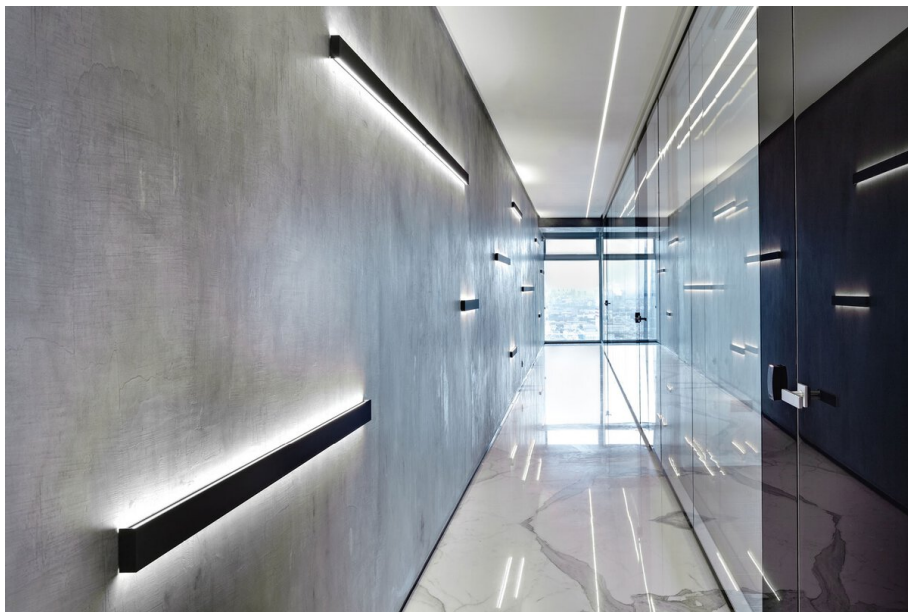

## Used products



**LINEA**



**LINEA system**



**MINIMAL 100  
trimless system**

