


Quickinfo

3000 K, 4000 K
CRI ≥ 95 / 2 SDCM (initial MacAdam)
up to 17 lm/W
L85 / 50000 h
DALI-2, DIM POTI
IP20

Types



Colours

PABLO shutter / iris / gobo

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter in spotlight housing; COB (Chip on Board) technology - maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; contour spotlight for precise rectangular or round shape; easy adjustment by 4 shading elements or by iris-shaped shade made of stainless steel; incl. high quality bi-convex glass lens; sharp object focusing through adjustable lens; focus using rubber adjustment ring on spotlight head; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, available as an accessory

DE Stromschienenstrahler aus Aluminiumdruckguss; Oberfläche pulverbeschichtet; 360° dreh- und 310° schwenkbar; Konverter im Strahlergehäuse; COB (Chip on Board) Technologie - höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Konturstrahler für exakte rechteckige oder runde Formgebung; einfache Einstellung durch 4 Abschattelemente oder durch irisförmige Abschatter aus Edelstahl; inkl. hochwertiger bikonvexer Glaslinse; scharfe Objekt-Fokussierung durch justierbare Linse; Fokussierung mittels gummiertem Verstellring am Strahlerkopf; Adapter für werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3-Phasen Stromschienen; Adapter-Fixierung wahlweise werkzeuglos mittels Rändel- oder Feststellschraube (Schraubendreher erforderlich); Punktauslass, wahlweise in Anbaugehäuse bzw. Einbaugehäuse, als Zubehör erhältlich



compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253



360° rotatable, 310° tiltable



shutter / iris / gobo



DIM POTI / rotation lock




PABLO shutter track

310° 360° | CRI ≥ 95 | 2 SDCM | 220-240 V | 1 ADDR. | X-PERT | X-PERT

31°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	201 lm	14 lm/W	1 8 0 - 5 3 ♁ 0 0 ◪
	4000 K	220 lm	16 lm/W	1 8 0 - 5 3 ♁ 0 1 ◪
23.0 W	3000 K	298 lm	13 lm/W	1 8 0 - 5 3 ♁ 1 0 ◪
	4000 K	327 lm	14 lm/W	1 8 0 - 5 3 ♁ 1 1 ◪






PABLO iris track

310° 360° | CRI ≥ 95 | 2 SDCM | 220-240 V | 1 ADDR. | X-PERT | X-PERT


32°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	210 lm	15 lm/W	1 8 0 - 5 4 ♁ 0 0 ◪
	4000 K	231 lm	17 lm/W	1 8 0 - 5 4 ♁ 0 1 ◪
23.0 W	3000 K	312 lm	14 lm/W	1 8 0 - 5 4 ♁ 1 0 ◪
	4000 K	343 lm	15 lm/W	1 8 0 - 5 4 ♁ 1 1 ◪




Planning Information

PABLO shutter

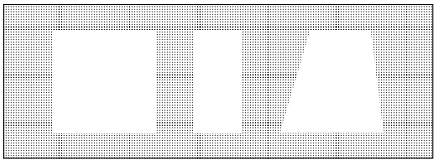


possible shapes of illumination

PABLO iris

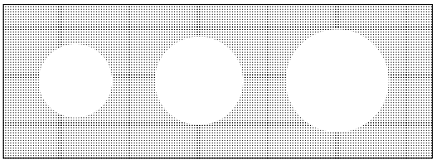

possible shapes of illumination

Illumination size



A (mm)	H (mm)	ø (mm)
1000	396	560
2000	792	1120
3000	1188	1680

Order options

MOUNTING	♁	CONTROL	◆	COLOUR	◪
set screw (tool required)	1	DALI-2	3	traffic white RAL 9016	7
tool-free fixation	2	DIM POTI	8	jet black RAL 9005	8

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	186-07227

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Order options

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8