


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
up to 128 lm/W
L80 / 50000 h, L85 / 50000 h
DALI-2, non DIM
Microprismatic, Opal
front IP20, IP54, back IP20

Types

MIRA round

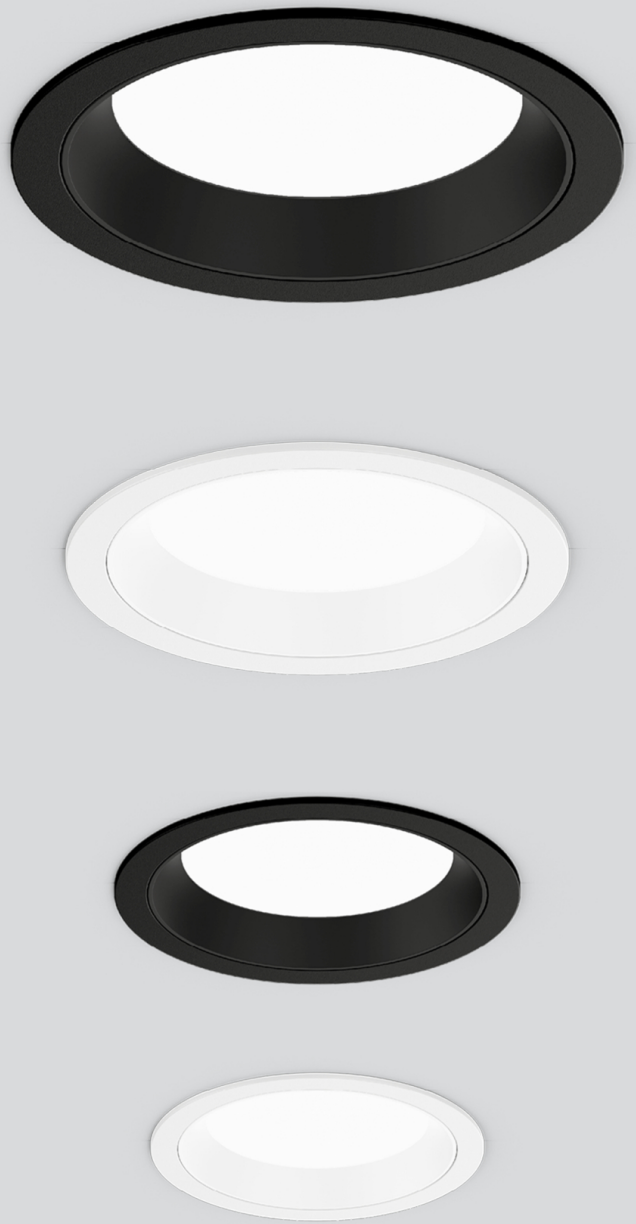

Colours


Light distributions

MIRA 150

recessed

EN Round recessed spotlight in die-cast aluminium; with trim; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation without tools using snap spring closure; lighting level recessed; completely homogeneously illuminated, satinised or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering; external converter for ceiling insertion


DE Runder Einbaustrahler aus Aluminiumdruckguss; mit umlaufendem Rand; geeignet für Deckenstärken von 2-25 mm; Oberfläche pulverbeschichtet; werkzeuglose Montage mittels Schnappfederverschluss; Leuchtenebene zurückversetzt; absolut homogen ausgeleuchtete, satinierte oder mikroprismatische PMMA-Abdeckung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; externer Konverter für Deckeneinwurf



MIRA 150 round trim

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · IP20 / IP54 · X-PERT · X-PERT






OPAL CRI ≥ 90

SYSTEM	COLOUR TEMP.	COLOUR	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	jet black	1380 lm	106 lm/W	● 5 2 - 9 3 2 3 5 ◆ 8 O
		pure white	1500 lm	115 lm/W	● 5 2 - 9 3 2 3 5 ◆ 7 O
	4000 K	jet black	1520 lm	117 lm/W	● 5 2 - 9 3 2 3 6 ◆ 8 O
		pure white	1660 lm	128 lm/W	● 5 2 - 9 3 2 3 6 ◆ 7 O
18.6 W	3000 K	jet black	1850 lm	99 lm/W	● 5 2 - 9 3 2 4 5 ◆ 8 O
		pure white	2020 lm	109 lm/W	● 5 2 - 9 3 2 4 5 ◆ 7 O
	4000 K	jet black	2040 lm	110 lm/W	● 5 2 - 9 3 2 4 6 ◆ 8 O
		pure white	2220 lm	119 lm/W	● 5 2 - 9 3 2 4 6 ◆ 7 O

MICROPRISMATIC CRI ≥ 90

SYSTEM	COLOUR TEMP.	COLOUR	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	jet black	1340 lm	103 lm/W	● 5 2 - 9 3 2 3 5 ◆ 8 P
		pure white	1470 lm	113 lm/W	● 5 2 - 9 3 2 3 5 ◆ 7 P
	4000 K	jet black	1480 lm	114 lm/W	● 5 2 - 9 3 2 3 6 ◆ 8 P
		pure white	1620 lm	125 lm/W	● 5 2 - 9 3 2 3 6 ◆ 7 P
18.6 W	3000 K	jet black	1800 lm	97 lm/W	● 5 2 - 9 3 2 4 5 ◆ 8 P
		pure white	1970 lm	106 lm/W	● 5 2 - 9 3 2 4 5 ◆ 7 P
	4000 K	jet black	1980 lm	106 lm/W	● 5 2 - 9 3 2 4 6 ◆ 8 P
		pure white	2170 lm	117 lm/W	● 5 2 - 9 3 2 4 6 ◆ 7 P

Electrical mounting accessories



THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	0 0 5 - 2 5 3 1 1 1 0
DALI cable ø 4 – 12 mm	105·58·30	0 0 5 - 2 5 5 1 1 1 0

Linect®-Ready

Order options

IP RATING FRONT	●	CONTROL	◆	COLOUR	
IP20	0	non DIM	1	pure white	RAL 9010
IP54	8	DALI-2	3	jet black	RAL 9005