



STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

DE Wandeinbauleuchte aus Aluminium in schlichtem, reduziertem Design; Oberfläche schutzeloziert und dunkelgrau oder schwarz pulverbeschichtet; teilbedrucktes Sicherheitsglas, fixiert mit Edelstahlschrauben; Reflektor aus matt eloxiertem Reinaluminium mit asymmetrischer Abstrahlcharakteristik; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schutzart IP65, mit Druckausgleichsventil; Umgebungstemperaturen von -20°C bis +50°C; separater Leuchtenanschlussraum, geeignet für Weiterverkabelung

Quickinfo

3000 K
CRI $\geq$ 80 / 3 SDCM (initial MacAdam)
up to 39 lm/W
L80 / 50000 h
non DIM
IP65, IK08

Types



Colour



Light distributions






STREAMCUT wall




ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	293 lm	39 lm/W	0 8 8 - 2 8 3 1 5 1 ☒




Planning Information

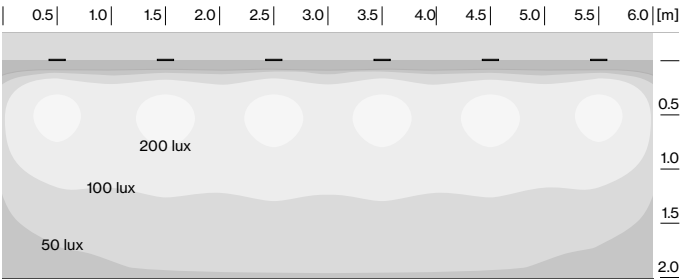

STREAMCUT wall (8.4 W, 6 luminaires)
wall mounting height from bottom: 0.8m/distance between luminaires: 1.0m

Mounting accessories (optional)



MOUNTING HOUSING for concrete and solid walls

L·W·H (mm)	ORDER CODE
290-100-200	0 8 8 - 2 8 9 1 1 1 0

Order options

COLOUR	
grey aluminium RAL 9007	D
jet black RAL 9005	8