



## UNICO wall

recessed


**EN** Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

**DE** Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe

### Quickinfo

2700 K, 3000 K, 4000 K  
CRI  $\geq$  90 / 3 SDCM (initial MacAdam)  
up to 62 lm/W  
L80 / 50000 h, L90 / 50000 h  
DALI-2, non DIM  
IP20

### Types



### Colours



### Mounting set




### Light distributions




homogeneous  
floor illumination



safety glass for  
dust protection




### UNICO wall 1 lamp recessed




#### WIDE FLOOR jet black, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE                 |
|--------|--------------|-----------|----------|----------------------------|
| 9.0 W  | 2700 K       | 492 lm    | 55 lm/W  | 0 9 0 - 6 L 1 4 ▸ UB 0 0 1 |
|        | 3000 K       | 524 lm    | 58 lm/W  | 0 9 0 - 6 L 1 5 ▸ UB 0 0 1 |
|        | 4000 K       | 562 lm    | 62 lm/W  | 0 9 0 - 6 L 1 6 ▸ UB 0 0 1 |




### UNICO wall 2 lamps recessed




#### WIDE FLOOR jet black, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE                 |
|--------|--------------|-----------|----------|----------------------------|
| 17.3 W | 2700 K       | 934 lm    | 54 lm/W  | 0 9 0 - 6 L 2 4 ▸ UB 0 0 1 |
|        | 3000 K       | 995 lm    | 58 lm/W  | 0 9 0 - 6 L 2 5 ▸ UB 0 0 1 |
|        | 4000 K       | 1070 lm   | 62 lm/W  | 0 9 0 - 6 L 2 6 ▸ UB 0 0 1 |




## Planning Information

### wide floor

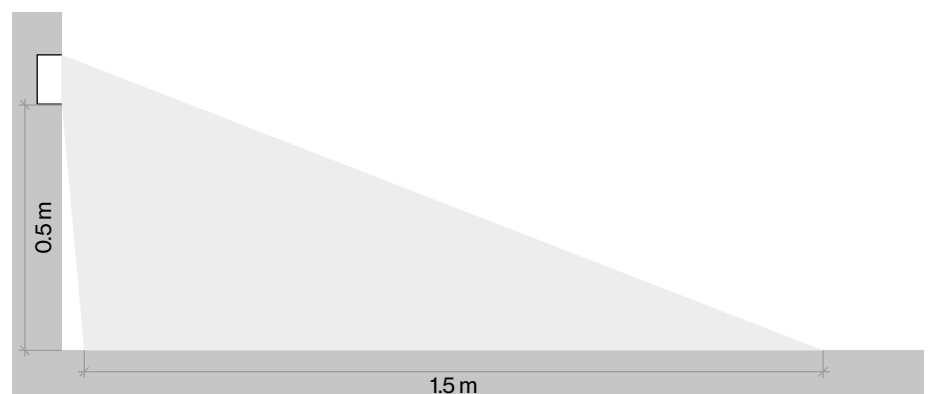

## Mounting accessories (required)




### MOUNTING SET trimless for plasterboard ceilings

| PLASTERBOARD CEILING THICKNESS | L-W-H (mm) | ORDER CODE            |
|--------------------------------|------------|-----------------------|
| 12.5/15/20/25 mm               | 85-47-47   | 0 9 0 - 7 L 2 0 1 0 0 |

for UNICO L2 and UNICO wall recessed 1 lamp

## Order options

| CONTROL | COLOUR                   |
|---------|--------------------------|
| non DIM | 1 jet black RAL 9005     |
| DALI-2  | 3 traffic white RAL 9016 |



MOUNTING SET trimless for plasterboard ceilings

| PLASTERBOARD CEILING THICKNESS             | L-W-H (mm) | ORDER CODE            |
|--------------------------------------------|------------|-----------------------|
| 12.5/15/20/25 mm                           | 85-85-47   | 0 9 0 - 7 Q 4 0 1 0 0 |
| for UNICO Q4   UNICO wall recessed 2 lamps |            |                       |



MOUNTING SET with trim for intermediate ceilings, 2-25 mm


| COLOUR                                      | L-W-H (mm) | ORDER CODE            |
|---------------------------------------------|------------|-----------------------|
| jet black                                   | 101-63-30  | 0 9 0 - 7 L 2 0 2 0 B |
| traffic white                               | 101-63-30  | 0 9 0 - 7 L 2 0 2 0 W |
| for UNICO L2 and UNICO wall recessed 1 lamp |            |                       |



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

| COLOUR                                     | L-W-H (mm) | ORDER CODE            |
|--------------------------------------------|------------|-----------------------|
| jet black                                  | 101-101-30 | 0 9 0 - 7 Q 4 0 2 0 B |
| traffic white                              | 101-101-30 | 0 9 0 - 7 Q 4 0 2 0 W |
| for UNICO Q4   UNICO wall recessed 2 lamps |            |                       |

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

| L-W-H (mm)                    | ORDER CODE            |
|-------------------------------|-----------------------|
| 240-400-130                   | 0 5 2 - 1 9 1 4 3 2 0 |
| order mounting set separately |                       |

Order options

| CONTROL |   | COLOUR        |          |
|---------|---|---------------|----------|
| non DIM | 1 | jet black     | RAL 9005 |
| DALI-2  | 3 | traffic white | RAL 9016 |