


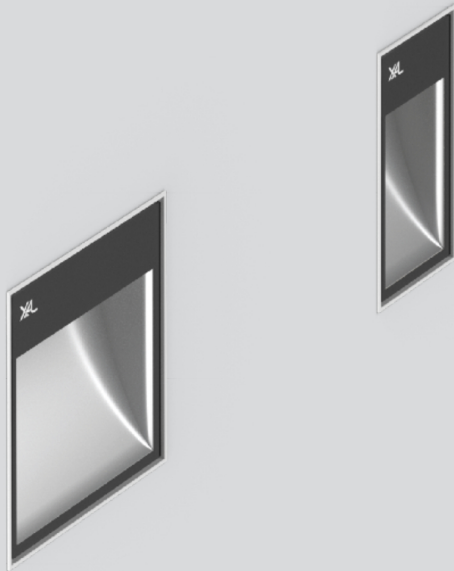

UNICO wall

recessed


EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

DE Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe

Quickinfo

2700 K, 3000 K, 4000 K
CRI $\geq$ 90 / 3 SDCM (initial MacAdam)
up to 62 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non DIM
IP20

Types



Colours



Mounting set




Light distributions




homogeneous
floor illumination



safety glass for
dust protection




UNICO wall 1 lamp recessed




WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.0 W	2700 K	492 lm	55 lm/W	0 9 0 - 6 L 1 4 ⇄ UB 0 0 1
	3000 K	524 lm	58 lm/W	0 9 0 - 6 L 1 5 ⇄ UB 0 0 1
	4000 K	562 lm	62 lm/W	0 9 0 - 6 L 1 6 ⇄ UB 0 0 1




UNICO wall 2 lamps recessed




WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	0 9 0 - 6 L 2 4 ⇄ UB 0 0 1
	3000 K	995 lm	58 lm/W	0 9 0 - 6 L 2 5 ⇄ UB 0 0 1
	4000 K	1070 lm	62 lm/W	0 9 0 - 6 L 2 6 ⇄ UB 0 0 1



Planning Information

wide floor

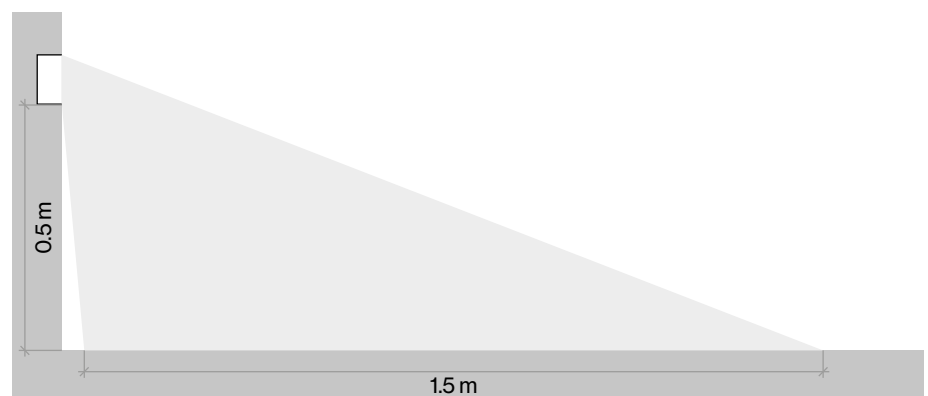


Mounting accessories (required)

MOUNTING SET trimless for plasterboard ceilings


PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	85-47-47	0 9 0 - 7 L 2 0 1 0 0

for UNICO L2 and UNICO wall recessed 1 lamp



Order options

CONTROL		COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	85-85-47	0 9 0 - 7 Q 4 0 1 0 0
for UNICO Q4 UNICO wall recessed 2 lamps		



MOUNTING SET with trim for intermediate ceilings, 2-25 mm


COLOUR	L-W-H (mm)	ORDER CODE
jet black	101-63-30	0 9 0 - 7 L 2 0 2 0 B
traffic white	101-63-30	0 9 0 - 7 L 2 0 2 0 W
for UNICO L2 and UNICO wall recessed 1 lamp		



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
jet black	101-101-30	0 9 0 - 7 Q 4 0 2 0 B
traffic white	101-101-30	0 9 0 - 7 Q 4 0 2 0 W
for UNICO Q4 UNICO wall recessed 2 lamps		

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

L-W-H (mm)	ORDER CODE
240-400-130	0 5 2 - 1 9 1 4 3 2 0
order mounting set separately	

Order options

CONTROL		COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016