


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
up to 62 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non DIM
IP20

Types

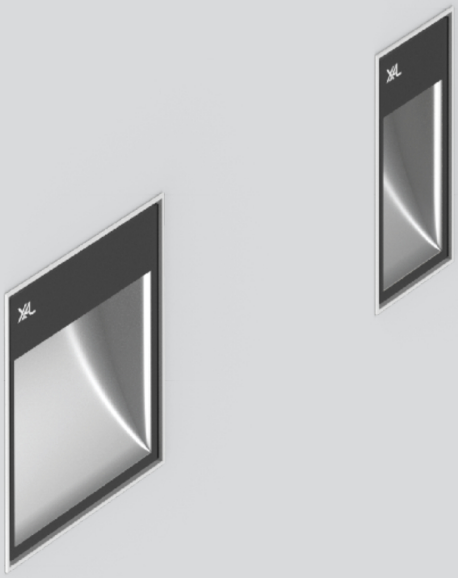

Colours

Mounting set

Light distributions

UNICO wall

recessed

EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering


DE Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe



homogeneous floor illumination



saftey glass for dust protection





UNICO wall 1 lamp recessed

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · X-PERT

WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.0 W	2700 K	492 lm	55 lm/W	090-6L14 UB001
	3000 K	524 lm	58 lm/W	090-6L15 UB001
	4000 K	562 lm	62 lm/W	090-6L16 UB001






UNICO wall 2 lamps recessed

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · X-PERT


WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	090-6L24 UB001
	3000 K	995 lm	58 lm/W	090-6L25 UB001
	4000 K	1070 lm	62 lm/W	090-6L26 UB001




Planning Information

wide floor

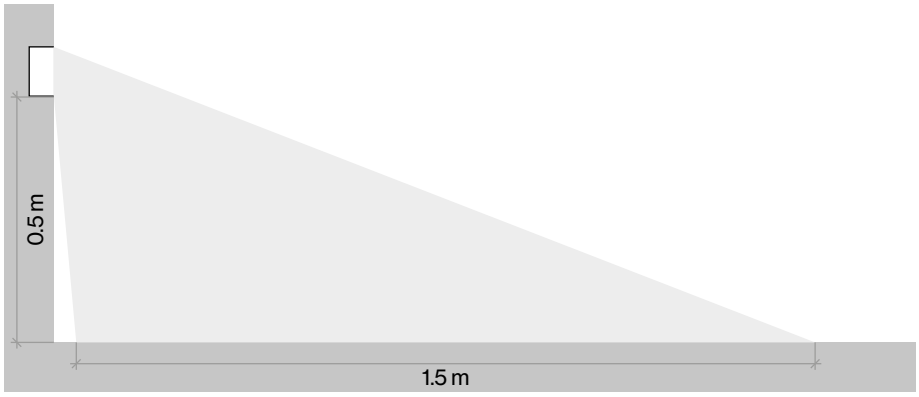

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·47·47	090-7L201 00

for UNICO L2 and UNICO wall recessed 1 lamp

Order options

CONTROL		COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·85·47	0 9 0 - 7 Q 4 0 1 0 0


for UNICO Q4 | UNICO wall recessed 2 lamps



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·63·30	0 9 0 - 7 L 2 0 2 0 B
traffic white	101·63·30	0 9 0 - 7 L 2 0 2 0 W

for UNICO L2 and UNICO wall recessed 1 lamp




MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·101·30	0 9 0 - 7 Q 4 0 2 0 B
traffic white	101·101·30	0 9 0 - 7 Q 4 0 2 0 W

for UNICO Q4 | UNICO wall recessed 2 lamps

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

L·W·H (mm)	ORDER CODE
240·400·130	0 5 2 - 1 9 1 4 3 2 0

order mounting set separately

Order options

COLOUR	
jet black	RAL 9005
traffic white	RAL 9016