



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 16, UGR ≤ 19, UGR ≤ 22, UGR ≤ 25
up to 141 lm/W
L80 / 75000 h
DALI-2, non DIM
IP20

Types



Colours



Reflector



Light distributions





UNICO L4 / L6

ceiling

EN Rectangular surface mounted multi-downlight made of aluminium; equipped with four (L4) / six (L6) individually selectable or prespecified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

DE Rechteckiger Anbau-Multi-Downlight aus Aluminium; bestückt mit vier (L4) / sechs (L6) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe



black & chrome reflector



one luminaire multiple scenes





UNICO L4 ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ B ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ B ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ B ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ B ◪ ■ 2 1

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ C ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ C ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ C ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ C ◪ ■ 2 1

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ D ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ D ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ D ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ D ◪ ■ 2 1

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ K ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ K ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ K ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ K ◪ ■ 2 1

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ E ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ E ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ E ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ E ◪ ■ 2 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ F ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ F ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ F ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ F ◪ ■ 2 1

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	lm	0 9 0 - 1 L 4 9 ◆ G ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 4 0 ◆ G ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 4 2 ◆ G ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 4 1 ◆ G ◪ ■ 2 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	1110 lm	0 9 0 - 1 L 4 9 ◆ A ◪ 0 2 1
	3000 K	1110 lm	0 9 0 - 1 L 4 0 ◆ A ◪ 0 2 1
	3500 K	1160 lm	0 9 0 - 1 L 4 2 ◆ A ◪ 0 2 1
	4000 K	1180 lm	0 9 0 - 1 L 4 1 ◆ A ◪ 0 2 1

FLOOR/WALL + FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	1310 lm	0 9 0 - 1 L 4 9 ◆ W ◪ ■ 2 1
	3000 K	1310 lm	0 9 0 - 1 L 4 0 ◆ W ◪ ■ 2 1
	3500 K	1360 lm	0 9 0 - 1 L 4 2 ◆ W ◪ ■ 2 1
	4000 K	1390 lm	0 9 0 - 1 L 4 1 ◆ W ◪ ■ 2 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
11.0 W	2700 K	1310 lm	0 9 0 - 1 L 4 9 ◆ W ◪ ■ 2 2
	3000 K	1310 lm	0 9 0 - 1 L 4 0 ◆ W ◪ ■ 2 2
	3500 K	1360 lm	0 9 0 - 1 L 4 2 ◆ W ◪ ■ 2 2
	4000 K	1390 lm	0 9 0 - 1 L 4 1 ◆ W ◪ ■ 2 2

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		





UNICO L6 ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ B ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ B ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ B ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ B ◪ ■ 2 1

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ C ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ C ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ C ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ C ◪ ■ 2 1

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ D ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ D ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ D ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ D ◪ ■ 2 1

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ K ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ K ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ K ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ K ◪ ■ 2 1

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ E ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ E ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ E ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ E ◪ ■ 2 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ F ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ F ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ F ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ F ◪ ■ 2 1

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ G ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ G ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ G ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ G ◪ ■ 2 1

RECTANGULAR MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	lm	0 9 0 - 1 L 6 9 ◆ R ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 6 0 ◆ R ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 6 2 ◆ R ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 6 1 ◆ R ◪ ■ 2 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	1680 lm	0 9 0 - 1 L 6 9 ◆ A ◪ 0 2 1
	3000 K	1680 lm	0 9 0 - 1 L 6 0 ◆ A ◪ 0 2 1
	3500 K	1750 lm	0 9 0 - 1 L 6 2 ◆ A ◪ 0 2 1
	4000 K	1790 lm	0 9 0 - 1 L 6 1 ◆ A ◪ 0 2 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
16.4 W	2700 K	1980 lm	0 9 0 - 1 L 6 9 ◆ W ◪ ■ 2 1
	3000 K	1980 lm	0 9 0 - 1 L 6 0 ◆ W ◪ ■ 2 1
	3500 K	2060 lm	0 9 0 - 1 L 6 2 ◆ W ◪ ■ 2 1
	4000 K	2100 lm	0 9 0 - 1 L 6 1 ◆ W ◪ ■ 2 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

New Babylon, The Hague

Netherlands

Architect
Studio Linse

Photographer
Kris Dekeijser



Used products



MINO 60 CIRCLE suspended



UNICO L4 / L6 recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


-2
parkeren
-2


-2

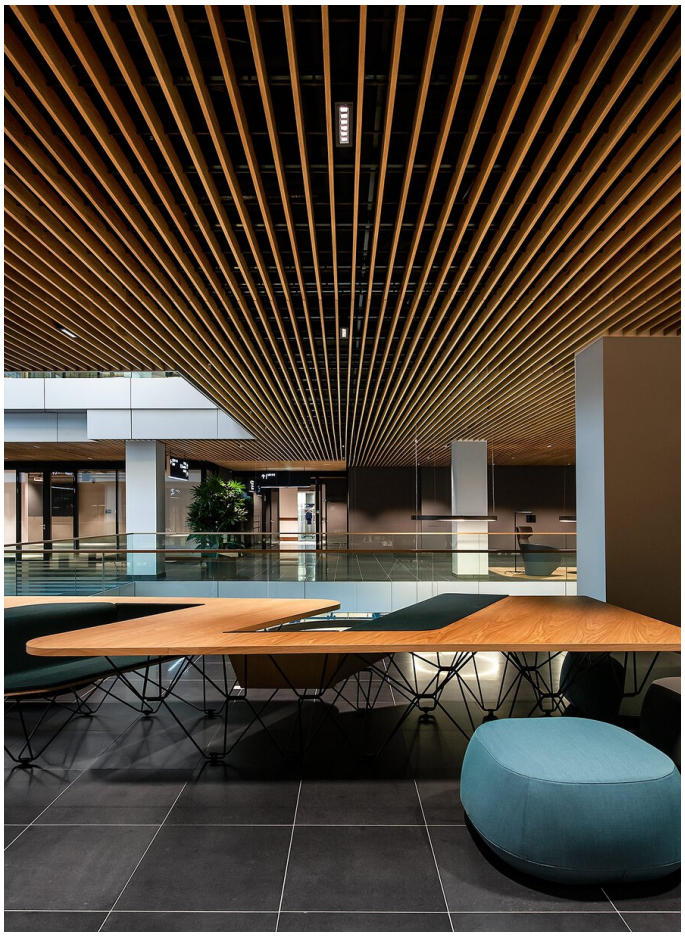

https://xal.com/en/experience-light/projects/pr/new-babylon-the-hague-382799



