




## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
L80 / 75000 h
DALI-2, non DIM
IP20

### Types




### Colours



### Reflector



### Light distributions




# UNICO L4 / L6

ceiling

EN Rectangular surface mounted multi-downlight made of aluminium; equipped with four (L4) / six (L6) individually selectable or pre-specified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

DE Rechteckiger Anbau-Multi-Downlight aus Aluminium; bestückt mit vier (L4) / sechs (L6) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe




black & chrome reflector



one luminaire multiple scenes






## **UNICO L4** ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

### MEDIUM ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ B ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ B ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ B ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ B ◪ ■ 2 1 |

### FLOOD ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ C ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ C ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ C ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ C ◪ ■ 2 1 |

### WIDE FLOOD ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ D ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ D ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ D ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ D ◪ ■ 2 1 |

### SPOT ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ K ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ K ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ K ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ K ◪ ■ 2 1 |

### MEDIUM SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ E ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ E ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ E ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ E ◪ ■ 2 1 |

### FLOOD SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◇ F ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◇ F ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◇ F ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◇ F ◪ ■ 2 1 |

**Order options**

| CONTROL ◇ | | COLOUR ◪ | | REFLECTOR ■ | |
|---|---|---|---|---|---|
| non DIM | 1 | jet black RAL 9005 | B | chrome | 0 |
| DALI-2 | 3 | white aluminium RAL 9006 | G | black | B |
| | | traffic white RAL 9016 | W | | |

### WIDE FLOOD SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | lm | 0 9 0 - 1 L 4 9 ◆ G ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 4 0 ◆ G ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 4 2 ◆ G ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 4 1 ◆ G ◪ ■ 2 1 |

### WALLWASHER CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | 1110 lm | 0 9 0 - 1 L 4 9 ◆ A ◪ 0 2 1 |
| | 3000 K | 1110 lm | 0 9 0 - 1 L 4 0 ◆ A ◪ 0 2 1 |
| | 3500 K | 1160 lm | 0 9 0 - 1 L 4 2 ◆ A ◪ 0 2 1 |
| | 4000 K | 1180 lm | 0 9 0 - 1 L 4 1 ◆ A ◪ 0 2 1 |


### FLOOR/WALL + FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | 1310 lm | 0 9 0 - 1 L 4 9 ◆ W ◪ ■ 2 1 |
| | 3000 K | 1310 lm | 0 9 0 - 1 L 4 0 ◆ W ◪ ■ 2 1 |
| | 3500 K | 1360 lm | 0 9 0 - 1 L 4 2 ◆ W ◪ ■ 2 1 |
| | 4000 K | 1390 lm | 0 9 0 - 1 L 4 1 ◆ W ◪ ■ 2 1 |

### WALL FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 11.0 W | 2700 K | 1310 lm | 0 9 0 - 1 L 4 9 ◆ W ◪ ■ 2 2 |
| | 3000 K | 1310 lm | 0 9 0 - 1 L 4 0 ◆ W ◪ ■ 2 2 |
| | 3500 K | 1360 lm | 0 9 0 - 1 L 4 2 ◆ W ◪ ■ 2 2 |
| | 4000 K | 1390 lm | 0 9 0 - 1 L 4 1 ◆ W ◪ ■ 2 2 |






## **UNICO L6** ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

### MEDIUM ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ◆ B ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ◆ B ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ◆ B ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ◆ B ◪ ■ 2 1 |

### FLOOD ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ◆ C ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ◆ C ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ◆ C ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ◆ C ◪ ■ 2 1 |

## Order options

| CONTROL ◆ | | COLOUR ◪ | | REFLECTOR ■ | |
|---|---|---|---|---|---|
| non DIM | 1 | jet black RAL 9005 | B | chrome | 0 |
| DALI-2 | 3 | white aluminium RAL 9006 | G | black | B |
| | | traffic white RAL 9016 | W | | |

### WIDE FLOOD ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ D ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ D ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ D ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ D ◪ ■ 2 1 |

### SPOT ROUND CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ K ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ K ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ K ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ K ◪ ■ 2 1 |

### MEDIUM SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ E ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ E ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ E ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ E ◪ ■ 2 1 |

### FLOOD SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ F ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ F ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ F ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ F ◪ ■ 2 1 |

### WIDE FLOOD SQUARE CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ G ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ G ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ G ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ G ◪ ■ 2 1 |

### RECTANGULAR MEDIUM CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | lm | 0 9 0 - 1 L 6 9 ⇕ R ◪ ■ 2 1 |
| | 3000 K | lm | 0 9 0 - 1 L 6 0 ⇕ R ◪ ■ 2 1 |
| | 3500 K | lm | 0 9 0 - 1 L 6 2 ⇕ R ◪ ■ 2 1 |
| | 4000 K | lm | 0 9 0 - 1 L 6 1 ⇕ R ◪ ■ 2 1 |

## Order options

| CONTROL ⇕ | | COLOUR ◪ | | REFLECTOR ■ | |
|---|---|---|---|---|---|
| non DIM | 1 | jet black RAL 9005 | B | chrome | 0 |
| DALI-2 | 3 | white aluminium RAL 9006 | G | black | B |
| | | traffic white RAL 9016 | W | | |

## WALLWASHER CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | 1680 lm | 0 9 0 - 1 L 6 9 ⇕ A ◪ 0 2 1 |
| | 3000 K | 1680 lm | 0 9 0 - 1 L 6 0 ⇕ A ◪ 0 2 1 |
| | 3500 K | 1750 lm | 0 9 0 - 1 L 6 2 ⇕ A ◪ 0 2 1 |
| | 4000 K | 1790 lm | 0 9 0 - 1 L 6 1 ⇕ A ◪ 0 2 1 |

## WALL FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|---|---|---|---|
| 16.4 W | 2700 K | 1980 lm | 0 9 0 - 1 L 6 9 ⇕ W ◪ ■ 2 1 |
| | 3000 K | 1980 lm | 0 9 0 - 1 L 6 0 ⇕ W ◪ ■ 2 1 |
| | 3500 K | 2060 lm | 0 9 0 - 1 L 6 2 ⇕ W ◪ ■ 2 1 |
| | 4000 K | 2100 lm | 0 9 0 - 1 L 6 1 ⇕ W ◪ ■ 2 1 |

## Order options

| CONTROL ⇕ | | COLOUR ◪ | | REFLECTOR ■ | |
|---|---|---|---|---|---|
| non DIM | 1 | jet black RAL 9005 | B | chrome | 0 |
| DALI-2 | 3 | white aluminium RAL 9006 | G | black | B |
| | | traffic white RAL 9016 | W | | |

# New Babylon, The Hague

Netherlands

**Architect**
Studio Linse

**Photographer**
Kris Dekeijser




**Used products**



**MINO 60 CIRCLE suspended**




**UNICO L4 / L6 recessed**

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


-2
parkeren
-2


-2

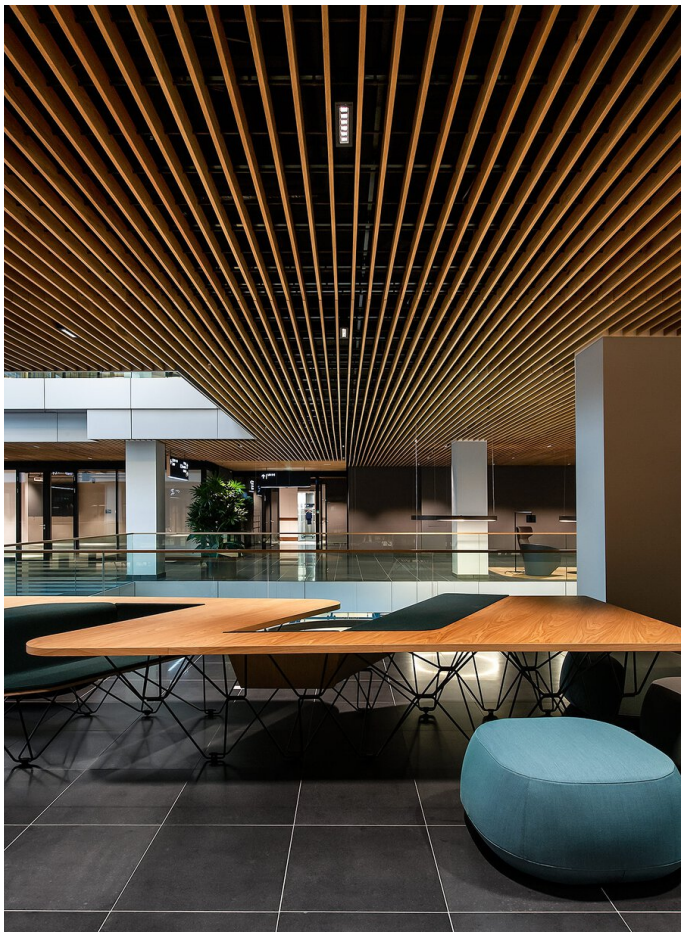

https://xal.com/en/experience-light/projects/pr/new-babylon-the-hague-382799

